




2025 FULL LINE BROCHURE



COMPANY PROFILE

HARD-WORKING KUBOTA TOOLS TO HELP YOU GET MORE DONE

For more than 50 years, Kubota has been your partner in pursuit of your property dreams.

As a do-it-yourselfer, you count on hard-working tools to help you get more done every day. And, like you, Kubota believes anything worth doing is worth doing right.

Whether you manage a two-acre yard or 2,000-acre ranch, hay field or construction site, our precision engineered orange equipment helps you conquer your goals one project at a time.

The entire Kubota product line – from utility vehicles and mowers, to tractors, hay tools and a full range of construction equipment – is quality built to keep you growing and improving your property, your business, and your community for years to come.

This brochure is a comprehensive look at our entire line and all the hard-working tools ready to help you get more done. Check out our recent innovations, new market entries, and products you likely already know well. We are constantly evolving to expand our products to better meet your needs for today and well into the future.

For more ideas to help you get more done, visit our website at KubotaUSA.com.



Kubota[®]

TABLE OF CONTENTS

SUB-COMPACT TRACTORS

2 BX Series

COMPACT TRACTORS

6 B01 Series

8 LX Series

12 Standard L Series

14 L60LE Series

18 Grand L60 Series

UTILITY TRACTORS

22 MX Series

24 M60 Series

26 M4 Series

28 M5 Series

30 M6S Series

32 M6 Series

AGRICULTURE TRACTORS

34 M7 Generation 4 Series

36 M8 Series

UTILITY/SPECIALTY AG TRACTORS

38 M Narrow Models

40 M Low-Profile Models

42 High-Clearance Models

HAY TOOLS

44 Disc Mowers

46 Disc Mower Conditioners

50 Tedders

52 Rotary Rakes

54 Wheel Rakes

56 Balers

58 Wrappers

60 VS Series

TRACTOR LOADER BACKHOES

62 Loaders/Landscapers

CONSTRUCTION EQUIPMENT

64 SCL1000 Series

66 SSV Compact Skid Steer Loaders

68 SVL Compact Track Loaders

70 Excavators

76 Wheel Loaders

UTILITY VEHICLES

78 RTV Series

81 Sidekick Series

84 RTV-X Series

MOWERS

92 T Series

94 GR Series

96 Z200 Series

98 Z400 Series

100 Z700 Series

102 SZ Series

104 W Series

106 ZG200 Series

108 ZG300 Series

110 ZD1000 Series

112 ZD1200 Series

114 ZD1611 Series

116 F Series

KUBOTA SERVICES

118 Kubota Services



SUB-COMPACT TRACTORS



BX Series BX1880 | BX2380 | BX2680

| | BX1880 | BX2380 | BX2680 |
|--|--|---------------|--------|
| Engine Type | Kubota, liquid-cooled, diesel, 3-cylinder | | |
| Horsepower (gross)* | 16.6 | 21.6 | 23.3 |
| Horsepower (PTO) | 13.7 | 17.7 | 19.2 |
| Displacement (cu. in.) | 43.9 | 54.8 | 61.1 |
| Length (w/ 3-point) | 95.5" | | |
| Width (min. tread) | 44.1" | 45.1" | |
| Height (with ROPS) | 81.9" | 83.1" | |
| Wheelbase | 55.1" | | |
| Ground Clearance (front axle) | 5.8" | 6.5" | |
| Speed (mph) (front/reverse) | 0-7.8 / 0-5.9 | 0-8.4 / 0-6.5 | |
| Rear 3-point hitch | Category I | | |
| Lift capacity 24" behind pin lbs. (kg) | 680 (310) | | |
| Transmission | HST, high-low gear shift (2 forward/reverse) | | |
| Tractor Weight (lbs.) | 1,404 | 1,454 | 1,520 |

* SAE J1995

Reliability. Comfort. Versatility.

- › Kubota's Swift-Tach® Loader allows for quick and easy removal and installation of the front loader without tools and without getting off the operator station
- › With an overall height of less than 7', the BX1880, BX2380, and BX2680 make storage a breeze — not having to fold the ROPS to park your tractor in a standard garage saves time and hassle
- › With a Standard Category I 3-point hitch, optional mid-mount mower decks, and an available front hitch, the BX Series can be equipped with an implement to quickly and easily handle most any loading task
- › The BX2380 and BX2680 deluxe operator's station with tilt steering and a deluxe high-back seat with armrests create a comfortable operator experience, making any chore seem less like work and more like fun
- › Equipped with a hydrostatic transmission (HST), the BX Series tractors are easy to use — simply press the pedal forward to go forward, press the pedal backwards for reverse — our treadle pedal system will have you feel like professionals in no time
- › Got snow? The Kubota heated cab is a great dealer-installed option to add to your BX Series to improve comfort and protect yourself during those cold winter months



| KEY ATTACHMENTS | | | | | |
|--|---|---------------|----------|-----------|---------------|
| Front Loader | LA344 – Pin-on Style Bucket LA344S – Two Lever Quick Attach Bucket | | | | |
| Mid-Mount Mower | 48", 54" | | 54", 60" | | |
| Easy-Over Mower | N/A | | 54", 60" | | |
| FRONT LOADER SPECIFICATIONS | LA344 | | | LA344S | |
| | BX1880 | BX2380/BX2680 | | BX1880 | BX2380/BX2680 |
| Maximum Lift Height | 70.7" | 71.0" | | 70.7" | 71.0" |
| Lift Capacity at Pivot Pin (1500 mm height) (lbs.) | 820 | | | 699 | |
| Breakout Force (bucket pivot pin) (lbf.) | 1,407 | | | 1,286 | |
| MOWER SPECIFICATIONS | MID-MOUNT | | | EASY-OVER | |
| Cutting Width | 48" | 54" | 60" | 54" | 60" |
| Discharge | Side | | | | |
| Mounting Method | Suspended | | | | |
| Adjustment of Cutting Height | Dial | | | | |

SUB-COMPACT TRACTORS



BX Series BX23S

BX23S

| | |
|-------------------------------|--|
| Engine Type | Kubota, liquid-cooled, diesel, 3-cylinder |
| Horsepower (gross)* | 21.6 |
| Horsepower (PTO) | 17.7 |
| Displacement (cu. in.) | 54.8 |
| Length (w/3-point) | 99.0" w/front guard |
| Width (min. tread) | 45.1" |
| Height (w/ROPS) | 86.2" |
| Wheelbase | 55.1" |
| Ground Clearance (front axle) | 6.5" |
| Speed (mph) (front/reverse) | 0-8.4 / 0-6.5 |
| Transmission | HST, high-low gear shift (2 forward/reverse) |
| Tractor Weight (lbs.) | 1,598 |

* SAE J1995; **Internal Kubota Test

Reliability. Comfort. Versatility.

- › Kubota's Swift-Tach® Loader allows for quick and easy removal and installation of the front loader without tools and without getting off the operator station
- › The Kubota Swift-Connec® backhoe on the BX23S is designed to match perfectly with the tractor and loader: not only designed to tackle tough digging jobs, but also designed to be versatile, the BX23S backhoe can be removed from the tractor quickly and easily without tools
- › With an optional Category I 3-point hitch, optional mid-mount mower decks, and an available front hitch, the BX Series can be equipped with an implement to quickly and easily handle almost any task
- › The BX23S has a deluxe high-back seat with armrests, tilt steering, and reversible seat for comfort when operating the tractor, loader, or backhoe
- › The ROPS operator opening has been widened, giving the operator additional room and comfort when operating the backhoe
- › Equipped with a hydrostatic transmission (HST), the BX Series tractors are easy to use — simply press the pedal forward to go forward, press the pedal backwards for reverse — our treadle pedal system will have you like professionals in no time
- › Got snow? The Kubota heated cab is a great dealer-installed option to add to your BX Series to improve comfort and protect yourself during those cold winter months

| KEY ATTACHMENTS | |
|-----------------|----------|
| Front Loader | Included |
| Backhoe | Included |
| Mid-Mount Mower | 54", 60" |
| Easy-Over Mower | 54", 60" |

| FRONT LOADER SPECIFICATIONS | LA340 Pin-on Style Bucket | LA340S Two Lever Quick Attach Bucket |
|--|------------------------------|---|
| Maximum Lift Height | 71" | |
| Lift Capacity at Pivot Pin (1500 mm height) (lbs.) | 820 | 699 |
| Breakout Force (bucket pivot pin) (lbf.) | 1,407 | 1,286 |

| BACKHOE SPECIFICATIONS | BT603 |
|------------------------|-----------------------|
| Digging Depth | 6' 2" |
| Transport Height | 67.7" |
| Reach from Swing Pivot | 102.8" |
| Bucket Size | 8", 12", 16" |
| Thumb | Optional – Mechanical |

| MOWER SPECIFICATIONS | MID-MOUNT | | EASY-OVER | |
|------------------------------|-----------|-----|-----------|-----|
| Cutting Width | 54" | 60" | 54" | 60" |
| Discharge | Side | | | |
| Mounting Method | Suspended | | | |
| Adjustment of Cutting Height | Dial | | | |

COMPACT TRACTORS



B01 Series B2301HSD | B2601HSD | B2401DT | B2401DTN

| | B2301HSD | B2601HSD | B2401DT | B2401DTN |
|--|---|----------------|--|----------------|
| Engine Type | Kubota, liquid-cooled, diesel, 3-cylinder, Engine gross HP is 20.9HP for B2301 and 24.3HP for B2601 | | Kubota liquid cooled, diesel, 3-cylinder | |
| Horsepower (gross)* | 20.9 | 23.3 | 21.9 | |
| Horsepower (PTO) | 17.4 | 19.4 | 19.2 | |
| Displacement (cu. in.) | 61.1 | 68.5 | 68.5 | |
| Length (w/o 3-point) | 93.7" | 94.9" | 93.7" | 92.8" |
| Width (min. tread) | 45.3" | 49" | 48.8" | 35.6" |
| Wheelbase | 61.4" | | 61.4" | |
| Ground Clearance | 12" | 12.8" | 12.2" | 11" |
| Speed (mph) (front/reverse) with standard tires | 0-11.8 / 0-8.9 | 0-12.7 / 0-9.5 | 0-11.7 / 0-6.0 | 0-10.9 / 0-5.6 |
| Rear-3 point hitch | Category I | | | |
| Lift capacity 24" behing LP lbs. (kg) | 1411 | | 1290 | |
| Transmission (HST) | HST (3-range) | | Gear (9F/3R) | |
| Tractor Weight (lbs.) | 1,566 | 1,632 | 1,521 | 1,433 |

Affordability. Power. Functionality.

- > The Standard B Series can be equipped with a Kubota engineered and built front end loader, which is designed to meet your task needs and can be removed from the tractor easily, no tools required
- > Kubota's Swift-Tach® loader, the LA435, allows for quick and easy removal and installation of the front loader without tools and without getting off the operator station
- > Available with a 54" or 60" mid-mount mower deck, the Standard B Series is designed to meet your turf mowing needs
- > Available Kubota front hitch allows for easy attachment or removal of front blade, front sweeper and front snow blower
- > Both the B2301HSD and B2601HSD models are designed to be comfortable throughout the entire day with features such as an easy-to-use HST transmission, a large semi-flat operator deck, tilt steering and a high-back suspension seat with standard arm rests
- > The all new B2401 model provides power and functionality at an affordable price with features such as a gear-drive transmission, large semi-flat operator deck, easy-to-use control levers and the unmatched Kubota quality
- > A Category I 3-point hitch with a quarter inching valve allows for a multitude of rear implements to meet customer needs
- > The B Series offers a wide variety of tires and sizes to fit your needs. The Goodyear R14 tires are a hybrid of the R4 (Industrial) and R1 (Ag) tires for maximum versatility

| KEY ATTACHMENTS | |
|-----------------|----------|
| Front Loader | LA435 |
| Backhoe | BH70 |
| Mid-Mount Mower | 54", 60" |

| FRONT LOADER SPECIFICATIONS | |
|--|-------|
| LA435 | |
| Maximum Lift Height at Pivot Pin | 78.5" |
| Lift Capacity at Pivot Pin (1500 mm height) (lbs.) | 1,175 |
| Breakout Force (bucket pivot pin) (lbf.) | 2,146 |

| BACKHOE SPECIFICATIONS | |
|-----------------------------------|-----------------------|
| BH70 | |
| Digging Depth (2 ft. flat bottom) | 85.2" |
| Loading Height | 61.6" |
| Reach from Swing Pivot | 116.8" |
| Bucket Size | 10", 12", 16" |
| Thumb | Optional – Mechanical |

| MID-MOUNT MOWER SPECIFICATIONS | |
|--------------------------------|-----------|
| Cutting Width | 54", 60" |
| Discharge | Side |
| Mounting Method | Suspended |
| Adjustment of Cutting Height | Dial |

COMPACT TRACTORS



LX20 Series

LX3520DTN | LX3520HSD | LX4020HSD

| | LX2620HSD | LX2620SUHSD | LX3520DTN | LX3520HSD | LX4020HSD |
|--|--|-------------|---|----------------|-----------------|
| Engine Type | Indirect injection, vertical, water-cooled, 4 - cycle diesel | | Direct injection, vertical, water-cooled, 4 - cycle diesel with turbo charger | | |
| Horsepower (gross)* | 23.3 | | 34.9 | | 39.8 |
| Horsepower (PTO) | 19.4 | | 29.6 | 28.7 | 32.6 |
| Displacement (cu. in.) | 77.0 | | 91.4 | | |
| Transmission | HST (3 ranges) | | Gear | HST (3 ranges) | |
| Speed (mph) (front/reverse) with standard tires | 0-11.2 / 0-8.4 | | 0-14.7 / 0-14.6 | | 0-17.0 / 0-13.0 |
| Rear 3-point hitch | Category I | | | | |
| Lift capacity 24" behind lift point (lbs) | 1,676 | | 1,819 | 1,962 | |
| Length | 101.8" | | 2,494 | 101.6" | |
| Width | 53.7" | | 39.4" | 53.7" | |
| Wheelbase | 65.6" | | 61.0" | 66.7" | |
| Min. Ground Clearance | 14.6" | | 12.8" | 8.9" | |
| Tractor Weight (lbs.) | 1,775 | | 2,154 | 2,191 | 2,624 |

* SAE J1995

Comfort. Modern Styling. Operability.

- › Clutch-less for easy operation, Kubota's proven 3-range hydrostatic (HST) transmission provides optimal speeds to match your job. Choose from low range when you need extra power at a low speed, mid range for normal operations, or high range for transporting from place to place. In addition, the brake pedal is positioned on the left side for comfort and functionality
- › The LX20 Series offers a wide variety of tires and sizes to fit your needs. The Goodyear R14T tires are a hybrid of the R4 (Industrial) and R1 (Ag) tires for maximum versatility
- › The LX20 Series can be equipped with a Kubota-built, performance-matched front loader. Features include a standard 2-lever quick coupler for universal attachments, an optional Swift-Tach® kit with a one-lever quick coupler for faster loader removal, and an optional mechanical self-leveling kit for easier material handling including pallet fork applications
- › The LX20 tractors can be equipped with mid mount mower decks in 60" or 72" making them among the largest mid mount mower decks available. Additionally, the 60 and 72 inch options for the LX3520 and LX4020 come standard with an ingratiated wash port to quickly and effectively clean all 3 mower blades, making cleanup a breeze.
- › The LX3520 Narrow is ideal for spraying, mowing and towing between tight rows. With a total width of just 39.4 inches, the LX3520 Narrow can easily maneuver through orchards, vineyards, and nurseries

| FRONT LOADER SPECIFICATIONS | | | | |
|--|-------------------------|---------------------------------------|-----------------|------------------------|
| | LX2620HSD / LX2620SUHSD | LX3520SUHSDC / LX3520HSD / LX3520HSDC | LX3520DT NARROW | LX4020HSD / LX4020HSDC |
| Maximum Lift Height at Pivot Pin | LA535 84.0" | LA545 87.6" | N/A | LA545 87.6" |
| Maximum Lift Capacity at Pivot Pin (1500 mm height) (lbs.) | 1,324 | 1,325 | N/A | 1,325 |

| BACKHOE SPECIFICATIONS | |
|-----------------------------------|-----------------------|
| Digging Depth (2 ft. flat bottom) | BH77* 86.8" |
| Loading Height | 70.2" |
| Reach from Swing Pivot | 123.7" |
| Bucket Sizes | 10", 12", 16", 24" |
| Thumb | Optional – Mechanical |

| MID-MOUNT MOWER SPECIFICATIONS | |
|--------------------------------|-------------|
| Cutting Width | 60" & 72" |
| Discharge | Side |
| Mounting Method | Floating |
| Adjustment of Cutting Height | Gauge wheel |

*Specifications shown when attached to an LX3520HSD. BH77 specifications may vary depending on the tractor.

COMPACT TRACTORS



LX20 Series

LX3520SUHSDC | LX3520HSDC | LX4020HSDC

| | LX2620HSDC | LX3520SUHSDC | LX3520HSDC | LX4020HSDC |
|--|--|--|-----------------|------------|
| Engine Type | Indirect injection, vertical, water-cooled, 4 - cycle diesel | Direct injection, vertical, water-cooled, 4 -cycle diesel with turbo charger | | |
| Horsepower (gross)* | 23.3 | 34.9 | | 39.8 |
| Horsepower (PTO) | 19.4 | 28.7 | | 31.2 |
| Displacement (cu. in.) | 77.0 | | 91.4 | |
| Transmission | HST (3 ranges) | | | |
| Speed (mph) (front/reverse) with standard tires | 0-11.2 / 0-8.4 | | 0-17.0 / 0-13.0 | |
| Rear 3-point hitch | Category I | | | |
| Lift capacity 24" behind lift point (lbs) | 1,676 | | 1,962 | |
| Length | 103.9 | | 101.6" | |
| Width | | 53.7 | | |
| Wheelbase | 65.6 | | 66.7" | |
| Min. Ground Clearance | 14.6 | | 8.9" | |
| Tractor Weight (lbs.) | 2,249 | 2,590 | | 2,624 |

* SAE J1995

Comfort. Modern Styling. Operability.

- › The LX20 Series boasts three different horsepower options to meet a variety of needs. While focusing on operator comfort, noise reduction, and front loader operability, the LX20 models are the answer to comfort, ease of operation, and workability
- › Clutch-less for easy operation, Kubota's proven 3-range hydrostatic (HST) transmission provides optimal speeds to match your job. Choose from low range when you need extra power at a low speed, mid range for normal operations, or high range for transporting from place to place. In addition, the brake pedal is positioned on the left side for comfort and functionality
- › The LX20 Series factory-installed cabs optimize operator comfort year-round with deluxe features such as A/C and heater, front LED Headlights and work lights, a wide, spacious flat deck, reclining high-back suspension seat with standard armrests, tilt-steering, cruise control, telescopic stabilizers, mid* and rear PTO, integrated loader joystick and easy-to-use premium color-coded controls
- › The LX20 Series can be equipped with the Kubota-built, performance-matched front loader. Features include a standard 2-lever quick coupler for universal attachments, an optional Swift-Tach® kit with a one-lever quick coupler for faster loader removal, and an optional industry-exclusive mechanical self-leveling kit for easier material handling including pallet fork applications
- › In addition to the premium cab, the Special Utility (SU model) cab adds an economy cab tractor to the LX20 series lineup. The high power engine delivers performance while maintaining the comfort, quality and versatility of the LX20 Series
- › The LX20 tractors can be equipped with mid mount mower decks in 60" or 72" making them among the largest mid mount mower decks available. Additionally, the 60 and 72 inch options for the LX3520 and LX4020 come standard with an ingratiated wash port to quickly and effectively clean all 3 mower blades, making cleanup a breeze.

*Mid PTO standard on LX2620HSDC, LX3520HSDC, and LX4020HSDC

| FRONT LOADER SPECIFICATIONS | | | | |
|--|--------------|--------------|--------------|------------|
| | LX2620HSDC | LX3520SUHSDC | LX3520HSDC | LX4020HSDC |
| | LA535 | | LA545 | |
| Maximum Lift Height at Pivot Pin | 84.0" | | 87.6" | |
| Maximum Lift Capacity at Pivot Pin (1500 mm height) (lbs.) | 1,324 | | 1,325 | |

| BACKHOE SPECIFICATIONS | |
|-----------------------------------|-----------------------|
| | BH77* |
| Digging Depth (2 ft. flat bottom) | 86.8" |
| Loading Height | 70.2" |
| Reach from Swing Pivot | 123.7" |
| Bucket Sizes | 10", 12", 16", 24" |
| Thumb | Optional – Mechanical |

| MID-MOUNT MOWER SPECIFICATIONS | |
|--------------------------------|-------------|
| Cutting Width | 60" & 72" |
| Discharge | Side |
| Mounting Method | Floating |
| Adjustment of Cutting Height | Gauge wheel |

*Specifications shown when attached to an LX3520HSD. BH77 specifications may vary depending on the tractor.

COMPACT TRACTORS



Standard L02 Series L2502DT/HST | L3302DT/HST | L3902DT/HST | L4802DT/HST

| | L2502F (2WD) | | L2502 (4WD) | | L3302 (4WD) | | L3902 (4WD) | | L4802DT NARROW (4WD) | L4802F (2WD) | L4802 (4WD) | |
|--|---|---|---|---|---|---|---|---------------------|-------------------------------------|-------------------------|---|-----|
| | DT | HST | DT | HST | DT | HST | DT | HST | DT | DT | DT | HST |
| Engine Type | Direct injection, vertical, water-cooled 4-cycle diesel | | | | | | | | | | | |
| Horsepower (gross)* | 23.3 | | 33.0 | | 37.5 | | 48.4 | | | | 39.0 | |
| Horsepower (PTO) | 19.8 | 18.4 | 28.0 | 26.1 | 32.1 | 30.3 | 40.5 | | | | 39.0 | |
| Displacement (cu. in.) | 100.5 | | 111.4 | | 148.5 | | | | | | | |
| Transmission | Constant mesh with synchronized shuttle 8 forward and 8 reverse | Hydrostatic transmission, 3 range speed | Gear shift with synchronized shuttle, 8 forward and 8 reverse | Hydrostatic transmission, 3 range speed | Gear shift with synchronized shuttle, 8 forward and 8 reverse | Hydrostatic transmission, 3 range speed | Constant mesh with synchronized shuttle 8 forward and 8 reverse | | | | Hydrostatic transmission, 3 range speed | |
| Speed (mph) (front/reverse) with standard tires | 0.9-10.7 / 0.9-10.7 | 0-11.5 / 0-10.3 | 1.1-13.2 / 1.1-13.2 | 0-14.1 / 0-12.7 | 1.1-13.2 / 1.1-13.2 | 0-14.1 / 0-12.7 | 1.2-12.9 / 1.2 / 12.4 | 1.4-14.9 / 1.3-14.3 | 1.2-12.9 / 1.2 / 12.4 | 0-15.8 / 0-14.2 | | |
| Rear 3-point hitch | SAE Category I | | | | | | | | | | | |
| Lift capacity 24" behind lift point (lbs) | 1,389 | | 1,435 | | 2,320 | | | | | | | |
| Length | 111.4:" | | 108.7" | | 117.5" | | 122.8" | 120.3" | | | | |
| Width (min. tread) | | | 55.1" | | 52.7" | 62.2" | | | | | | |
| Wheelbase (2WD/4WD) | 63.8" | | 63.4" | | 72.6" | | | | | | | |
| Min. Ground Clearance | 13.6" | | 13.4" | | 11.5" | | 15.2" | | | | | |
| Tractor Weight (lbs) | 2,601 | 2,833 | 2,734 | 2,778 | 2,767 | 2,778 | 3,362 | 3,296 | 3,428 | 3,549 | | |

Comfort. Modern Styling. Operability.

- > The L02 Series continues the legendary Kubota Standard L history and further improves it. The L02 is once again designed with a Kubota engineered and built diesel engine, all metal hood and fenders, new Kubota engineered and built front loader while improving the overall comfort, operation and styling
- > Updated with new LED headlights and side work lights, lever grips and redesigned bonnet and front grille for a new updated styling look
- > Improved ease of use with clutchless independent PTO switch (HST models only)
- > Comfort enhanced operator stations that now include standard rubber floor mats, improved suspension seat, redesigned brake pedal layout (HST models only) and optional armrests
- > The L02 series provides multiple different horsepower options as well as 2WD/4WD and DT or HST transmission options to ensure that there is the right L02 model to fit your needs
- > The LA526 and LA766 front loader has a round-shaped bucket profile to maximize material handling performance when compared to previous models. It is available with a optional brush guard that offers improved protection for the LED headlights and bonnet as compared to the standard grill guard



KEY ATTACHMENTS

| | L2502F (2WD) & L2502DT/HST (4WD) | L3302 DT/HST & L3902 DT/HST (4WD) | L4802DT Narrow (4WD) | L4802F (2WD) & L4802 DT/HST (4WD) |
|--------------|----------------------------------|-----------------------------------|----------------------|-----------------------------------|
| Front Loader | LA526 | | N/A | LA766 |
| Backhoe | BH77 | | N/A | BH92 |

FRONT LOADER SPECIFICATIONS

| | LA526 | | N/A | LA766 |
|--|---------|---------|-----|---------|
| Maximum Lift Height at Pivot Pin | 94.8" | | N/A | 105.2" |
| Maximum Lift Capacity at Pivot Pin (1500 mm height) (lbs.) | 1,446.0 | 1,506.0 | N/A | 2,147.7 |

BACKHOE SPECIFICATIONS

| | BH77 | | N/A | BH92 |
|--|--------|--|-----|--------|
| Digging Depth (2 ft. flat bottom) | 89.8" | | N/A | 109.8" |
| Loading Height (length of dipper cyl. = 680 mm.) | 65.7" | | N/A | 84.3" |
| Reach from Swing Pivot | 124.3" | | N/A | 150.4" |

COMPACT TRACTORS



L60LE Series

L3560LE | L4060LE

| | L3560HST-LE (4WD) / L3560HSTC-LE (4WD, Cab) | L4060HST-LE (4WD) / L4060HSTC-LE (4WD, Cab) |
|--|---|---|
| Engine Type | Kubota, liquid-cooled, diesel, 3-cylinder | Kubota, liquid-cooled, diesel, 4-cylinder |
| Horsepower (gross)* | 37 | 42 |
| Horsepower (PTO) | 28 (HST/HSTC) | 32.5 (HST/HSTC) |
| Displacement (cu. in.) | 114.4 | 148.5 |
| Transmission | HST PLUS (3-range) | |
| Width (min. tread) | 59.8" | 66.5" |
| Wheelbase | 71.1" | 74.6" |
| Min. Ground Clearance | 13.5" | 14.4" |
| Tractor Weight (lbs.) (ROPS or cab) | 3,505 (HST) / 3,880 (HSTC) | 3,759 (HST) / 4,134 (HSTC) |

Affordability. Quality. Comfort.

- > The L60LE series provides deluxe Grand L features at an affordable price
- > With ROPS and cab options ranging from 37.0 to 42.0 gross horsepower, Kubota's L60LE Series offers four affordable horsepower models to choose from based on your application and implements requirements
- > The L60LE Series is equipped with a heavy duty front axle, cast steel transmission and rear end, as well as steel hood and fenders, making them built to last
- > HST Plus Transmission comes standard with productivity-increasing features like Stall Guard, H-DS (Hydraulic-Dual Speed), Auto-Throttle Advance, and an engine Throttle-Up Button — all of these features can be turned on or off easily based on the operator's needs and preferences
- > All L60LE Series have a deluxe operator's station that includes a premium seat with armrests and adjustable suspension seat, air-ride seat option, tilt steering, Kubota IntelliPanel® dash display, and a flat operator station with excellent legroom. Additionally, enjoy year round comfort with the L60LE Series wide, spacious deluxe cab models
- > Performance matched Kubota front loaders, backhoes, and front mounted snow attachments available plus a full line up of Land Pride performance matched implements



KEY ATTACHMENTS

| | L3560HST-LE (4WD) / L3560HSTC-LE (4WD, Cab) | L4060HST-LE (4WD) / L4060HSTC-LE (4WD, Cab) |
|--------------|--|--|
| Front Loader | LA555 / LA805 ¹ | LA805 |
| Backhoe | BH77 ² / BH92 | BH92 |

FRONT LOADER SPECIFICATIONS

| | LA555 | LA805 |
|---|----------|--------|
| Maximum Lift Height at Pivot Pin | 96.4" | 104.7" |
| Lift Capacity at Pivot Pin (Max Height) (lbs.) | 1,190 | 1,715 |
| Lift Capacity at Pivot Pin (1500 mm height) (lbs.) | 1,603 | 2,202 |
| Breakout Force (bucket pivot pin) (lbf.) | 2,677 | 3,301 |
| Mechanical 2-Lever Quick Coupler | Standard | |

BACKHOE SPECIFICATIONS

| | BH77 | BH92 |
|-----------------------------------|-----------------------|------------------------------------|
| Digging Depth (2 ft. flat bottom) | 91.8" | 109.8" |
| Loading Height | 66.7" | 84.3" |
| Reach from Swing Pivot | 124.6" | 150.4" |
| Bucket Sizes | 10", 12", 16", 24" | 12", 16", 18", 24", 30", 36" |
| Thumb | Optional – Mechanical | Optional – Mechanical or Hydraulic |



L60LE Series Continued

L60 HST ROP's VS L60LE HST ROP's Standard Feature Comparison

| Standard Feature | L60 Series (HST ROP's Models) | L60LE Series (HST ROP's Models) |
|---|-------------------------------|---------------------------------|
| Wide, Spacious Flat Operator Platform | ✓ | ✓ |
| Rubber Floor Mat | ✓ | ✓ |
| Deluxe Seat w/ Mechanical Suspension and Armrests | ✓ | ✓ |
| Tilt Steering | ✓ | ✓ |
| HST Plus Transmission: | | |
| Hydro Dual Speed | | |
| Stall Guard | | |
| Throttle-Up | ✓ | ✓ |
| Auto Throttle Advance | | |
| HST Response Control | | |
| Telescoping Lower Link Ends | ✓ | ✓ |
| Telescoping Stabilizers | ✓ | |
| Cruise Control | ✓ | |
| Stationary PTO Switch | ✓ | |

L60 CAB's VS L60LE CAB's Standard Feature Comparison

| Standard Feature | L60 Series (HST CAB Models) | L60LE Series (HST CAB Models) |
|---|-----------------------------|-------------------------------|
| Grand L Factory Cab | ✓ | ✓ |
| Heating and Air Conditioning | ✓ | ✓ |
| Deluxe Seat w/ Mechanical Suspension and Armrests | ✓ | ✓ |
| Tilt Steering | ✓ | ✓ |
| HST Plus Transmission: | | |
| Hydro Dual Speed | | |
| Stall Guard | | |
| Throttle-Up | ✓ | ✓ |
| Auto Throttle Advance | | |
| HST Response Control | | |
| Telescoping Link Ends Stabilizers | ✓ | ✓ |
| Cruise Control | ✓ | |
| Front Work Lights | | |
| Left and Right Side Mirrors | | |
| Stationary PTO Switch | ✓ | |

COMPACT TRACTORS



Grand L60 Series L3560 | L4060 | L4760 | L5060 | L5460 | L6060

| | L3560DT (4WD) / GST (4WD) / HST (4WD) / HSTC (4WD, Cab) | L4060DT (4WD) / GST (4WD) / HST (4WD) / HSTC (4WD, Cab) | L4760GST (4WD) / HST (4WD) / HSTC (4WD, Cab) |
|--|--|--|---|
| Engine Type | Kubota, liquid-cooled, diesel, 3-cylinder | Kubota, liquid-cooled, diesel, 4-cylinder | |
| Horsepower (gross)* | 37 | 42 | 49 |
| Horsepower (PTO) | 29.5 (DT/GST) 28 (HST/HSTC) | 34 (DT/GST) 32.5 (HST/HSTC) | 41 (GST) 39.5 (HST/HSTC) |
| Displacement (cu. in.) | 114.4 | 148.5 | |
| Transmission | FST: 8F/8R GST: 12F/8R HST PLUS (3-range) | | GST: 12F/8R HST PLUS (3-range) |
| Width (min. tread) | 59.8" | 66.5" | |
| Wheelbase | 71.1" | 74.6" | |
| Min. Ground Clearance | 13.5" | 14.4" | 14.2" |
| Tractor Weight (lbs.) (ROPS or cab) | 3,483 (DT) / 3,494 (GST) 3,505 (HST) / 3,880 (HSTC) | 3,737 (DT) / 3,748 (GST) 3,759 (HST) / 4,134 (HSTC) | 3,836 (GST) / 3,847 (HST) 4,222 (HSTC) |

Quality. Reliability. Comfort.

- > All Grand L60 Series Tractors can be equipped with performance-matched front end loaders and backhoes that are engineered and built to maximize performance
- > Available 4-Point Front hitch offers increased versatility. Customers can quickly and easily add a front blade, front snow blower, front broom, or front flail mower to their Grand L60
- > Available with an HST Plus (hydrostatic transmission), GST (Glide Shift Transmission), or FST (Fully Synchronized Main and Shuttle Transmission), the Kubota Grand L60 Series offers the choices you need to maximize your productivity
- > Factory Cab (heat and A/C) is available on all Hydrostatic Transmission (HST) models
- > HST Plus Transmission comes standard with productivity-increasing features like Stall Guard, H-DS (Hydraulic-Dual Speed), Auto-Throttle Advance, and an engine Throttle-Up Button — all of these features can be turned on or off easily based on the operator's needs and preferences
- > All L60 Series have a deluxe operator's station that includes a premium seat with armrests and adjustable suspension seat, air-ride seat option, tilt steering, Kubota IntelliPanel® dash display, and a flat operator station with excellent legroom — these key features and many more help to make the Grand L60 a pleasure to operate



KEY ATTACHMENTS

| | L3560DT (4WD) / GST (4WD) / HST (4WD) / HSTC (4WD, Cab) | L4060DT (4WD) / GST (4WD) / HST (4WD) / HSTC (4WD, Cab) | L4760GST (4WD) / HST (4WD) / HSTC (4WD, Cab) |
|--------------|---|---|--|
| Front Loader | LA555/LA805 ¹ | LA805 | LA1055 |
| Backhoe | BH77 ² /BH92 | | BH92 |

FRONT LOADER SPECIFICATIONS

| | LA555 | LA805 | LA1055 |
|--|-------|----------|--------|
| Maximum Lift Height at Pivot Pin | 96.4" | 104.7" | 112.7" |
| Lift Capacity at Pivot Pin (Max Height) (lbs.) | 1,190 | 1,715 | 2,361 |
| Lift Capacity at Pivot Pin (1500 mm height) (lbs.) | 1,603 | 2,202 | 2,974 |
| Breakout Force (bucket pivot pin) (lbf.) | 2,677 | 3,301 | 4,074 |
| Mechanical 2-Lever Quick Coupler | | Standard | |

BACKHOE SPECIFICATIONS

| | BH77 | BH92 |
|-----------------------------------|-----------------------|------------------------------------|
| Digging Depth (2 ft. flat bottom) | 91.8" | 109.8" |
| Loading Height | 66.7" | 84.3" |
| Reach from Swing Pivot | 124.6" | 150.4" |
| Bucket Sizes | 10", 12", 16", 24" | 12", 16", 18", 24", 30", 36" |
| Thumb | Optional – Mechanical | Optional – Mechanical or Hydraulic |

1 - LA805 must be used in conjunction with BH92 due to weight distribution; 2 - BH77 cannot be used on L3560HSTC model



Grand L60 Series Continued

Grand L60 Series

| | L5060GST (4WD) | L5460HST (4WD) / HSTC (4WD, Cab) | L6060HST (4WD) / HSTC (4WD, Cab) |
|---------------------------------------|---|-------------------------------------|-------------------------------------|
| Engine Type | Kubota, liquid-cooled, diesel, 4-cylinder | | |
| Horsepower (gross)* | 52 | 56 | 62 |
| Horsepower (PTO) | 44 | 46.5 | 53 |
| Displacement (cu. in.) | 148.5 | | |
| Transmission | 12F/8R | HST PLUS (3-range) | |
| Width (min. tread) | 67.3" | | |
| Wheelbase | 75.4" | | |
| Min. Ground Clearance | 15.4" | | |
| Tractor Weight (lbs.) (ROPS / cab) | 3,979 / N/A | 3,990 (HST) / 4,365 (HSTC) | |

KEY ATTACHMENTS

| | |
|--------------|--------|
| Front Loader | LA1055 |
| Backhoe | BH92 |

FRONT LOADER SPECIFICATIONS

| | LA1055 |
|---|----------|
| Maximum Lift Height at Pivot Pin | 112.7" |
| Lift Capacity at Pivot Pin (Max Height) (lbs.) | 2,361 |
| Lift Capacity at Pivot Pin (1500 mm height) (lbs.) | 2,974 |
| Breakout Force (bucket pivot pin) (lbf.) | 4,074 |
| Mechanical 2-Lever Quick Coupler | Standard |

BACKHOE SPECIFICATIONS

| | BH92 |
|-----------------------------------|------------------------------------|
| Digging Depth (2 ft. flat bottom) | 109.8" |
| Loading Height | 84.3" |
| Reach from Swing Pivot | 150.4" |
| Bucket Sizes | 12", 16", 18", 24", 30", 36" |
| Thumb | Optional – Mechanical or Hydraulic |

* SAE J1995

COMPACT UTILITY TRACTORS



MX Series

MX4900 | MX5400 | MX6000

MX4900 DT (4WD) / DTC (4WD) / HST (4WD) / HSTC (4WD)

MX5400F (2WD) / DT (4WD) / DTC (4WD) / HST (4WD) / HSTC (4WD)

MX6000HST (4WD) / HSTC (4WD)

| | MX4900 DT (4WD) / DTC (4WD) / HST (4WD) / HSTC (4WD) | MX5400F (2WD) / DT (4WD) / DTC (4WD) / HST (4WD) / HSTC (4WD) | MX6000HST (4WD) / HSTC (4WD) |
|---|---|---|-----------------------------------|
| Engine Type | Kubota liquid cooled, diesel, CRS, Direct Injection | | |
| Horsepower (gross)* | 50.3 (DT/DTC) / 51.8 (HST/HSTC) | 55.5 (F/DT/DTC) / 57.0 (HST/HSTC) | 63.4 |
| Horsepower (PTO) | 41.3 | 46.5 | 51.8 |
| Displacement (cu. in.) | 148.6 | | |
| Transmission | F/DT: Partially synchronized (3rd & 4th) Shuttle: Synchronized HST: Hydrostatic pedal operate | | HST: Hydrostatic pedal operate |
| Number of Speeds (forward/reverse) | F/DT: 8F/8R HST: 3-range speed | | 3-range speed |
| Hydraulic Flow (gpm) (remotes/3-point hitch) | 9.5 | | |
| Width | 69.7" | | |
| Wheelbase | 74.6" | | |
| Min. Ground Clearance | 15.2" | | |
| Tractor Weight (lbs.) | 3474 / 4268 | | 3734 / 4268 |

Affordable. Comfort. Versatility.

- > Achieve year-round comfort with the MX cab. This wide, spacious cab features a flat platform with plenty of legroom, tilt-steering, A/C & heating, easy access and use of operator levers and controls as well as the ability to accessorize it to fit your needs
- > Kick back and relax in the MX ROPS with features such as a wide, spacious flat rubber floor-mat deck, suspension seat and easy-to-use, ergonomically located color-coded controls



- > Whether your needs are to maximize productivity with the cost-effective gear-drive transmission, or to have smoother performance, greater operator comfort and ease-of use with the HST Transmission, the MX series offers you affordable choices in both CAB and ROPS models
- > Specifically designed to match the MX Series for maximum performance, the Kubota-built LA1065 front loader provides the power needed for heavy-duty jobs with its high lift capacity, lift height and breakout force
- > Versatility is unmatched with the MX Series. With a tight turning radius, Cat. 1 & 2 three-point hitch, Kubota's LA1065 front loader and BH92 backhoe plus a full lineup of Land Pride performance-matched implements, the MX Series was made for both big and small applications
- > Affordability isn't just the upfront purchase, it's there for the long haul. The MX Series feature strong, cast steel axles and rear end housing, a steel platform and fenders, a one-piece full-open steel hood, the world renowned Kubota diesel engine and protected hydraulic hoses. The MX Series is built to minimize maintenance cost by withstanding heavy loads or potential wear and tear over the years

KEY ATTACHMENTS

MX4900 / MX5400 / MX6000

| | |
|--------------|-------------------|
| Front Loader | LA1065 |
| Backhoe | BH92 ¹ |

FRONT LOADER SPECIFICATIONS

LA1065

| | |
|--|--------|
| Maximum Lift Height at Pivot Pin | 111.2" |
| Lift Capacity at Pivot Pin (Max Height) (lbs.) | 2275 |
| Lift Capacity at Pivot Pin (1500 mm height) (lbs.) | 2864 |
| Breakout Force (bucket pivot pin) (lbf.) | 3981 |

BACKHOE SPECIFICATIONS

BH92¹

| | |
|---|------------------------------------|
| Digging Depth (2 ft. flat bottom) | 109.8" |
| Loading Height (length of dipper cyl. = 680 mm) | 84.3" |
| Reach from Swing Pivot | 150.4" |
| Bucket Sizes | 12", 16", 18", 24", 30", 36" |
| Thumb | Optional – Mechanical or Hydraulic |

¹ BH92 Backhoe cannot be used with cab models

COMPACT UTILITY TRACTORS



M60 Series M5660 | M6060 | M7060

Dependable. Straightforward. Trustworthy.

- › Kubota's revolutionary common rail system (CRS) with exhaust gas recirculation system (EGR) and Diesel Particulate Filter (DPF) muffler combine more torque at low RPM with less emissions and better fuel efficiency than previous models
- › State-of-the-art external hydraulic cylinders improve lifting power and offer easier maintenance
- › The M5660SU offers an ample 17.2-gallon (65 L) capacity fuel tank to keep you working longer between fill-ups
- › The innovative and stylish design of the cab gives the operator a more comfortable and spacious environment year-round, with a curved upper windshield to increase upward visibility and rounded glass — ideal for long days inside the cab
- › Engines feature electronic control of engine RPM — with the push of a button, the system keeps engine revolution constant, making working with PTO-driven implements much more efficient
- › Hydraulic Shuttle Transmission is standard on all models for effortless shifting between forward and reverse

M60 Series

| | M5660SUH (2WD) / SUHD (4WD) | M6060HFC (2WD, Cab) / HD (4WD) / HDC (4WD, Cab) | M7060HFC (2WD, Cab) / HD (4WD) / HDC (4WD, Cab) / HD12 (4WD) / HDC12 (4WD, Cab) |
|---|--|---|---|
| Loader Model | LA1154SU | LA1154A | |
| Engine Type (Kubota Injection, diesel) | V2403-CR-TE4, 4-cylinder, common rail system | E-CDIS, V3307- CR-TE4, 4-cylinder | E-CDIS, V3307-CR-TE4, 4-cylinder |
| Horsepower (gross)* | 58.7 | 66.4 | 72.1 |
| Horsepower (PTO) | 50 | 56 | M7060HFC/HD/HDC 62.0 M7060HD12/HDC12 60.0 |
| Displacement (cu. in.) | 148.5 | 203.0 | |
| Alternator (amps) | 45 | 45 (ROPS) / 60 (cab) (100 optional) | |
| Transmission/Shuttle | Fully synchronized hydraulic shuttle | | |
| Height (top of ROPS / cab) | 95.3" | 96.9" / 100.6" | 97.2" / 101" |
| Overall Width | 73.2" | 73" | |
| Overall Length (2WD / 4WD) | 138.7" / 136" | 142.7" / 138" | |
| Std. Speeds (forward/reverse) | F8/R8 | F8/R8 | F8/R8, F12/R12 |
| Hydraulic (gpm) | 10.6 | 11.0 | 11.0 (16.0 on 12-speed models) |
| Hydraulic PTO (rpm) | 540 (540/540E optional) | | 540 (540/540E optional) (540/540E standard on 12-speed) |
| Category I/II, 3-Point Hitch | Yes | | |
| Tractor Weight – ROPS Models (2WD / 4WD) (lbs.) | 4189 / 4387 | N/A / 5005 | N/A / 5027 |
| Tractor Weight – Cab Models (2WD / 4WD) (lbs.) | N/A | 5226 / 5358 | 5248 / 5380 |
| Compatible Front Loader | LA1154SU | LA1154 | |
| FRONT LOADER SPECIFICATIONS | | | |
| Maximum Lift Height / Power at Pivot Pin | 130.9" | 132.7" / 117.2" | |
| Lift Capacity at Pivot Pin (Max Height / Power) (lbs.) | 2469 / 2928 | | |
| Lift Capacity at Pivot Pin (1500 mm height / power) (lbs.) | 3210 / 3686 | | |
| Breakout Force Height / Power (bucket pivot pin) (lbf) | 4230 / 5354 | | |

* SAE J1995



COMPACT UTILITY TRACTORS



M4 Series M4D-061 | M4-071 | M4D-071

| | M4D-061HDC12 / 4WD | M4-071HDC12 / 4WD | M4D-071HDC12 / 4WD |
|---|-----------------------------|--|-----------------------------|
| Engine | | V3307-CR-TE4 | |
| No. of Cylinders/Aspiration | | 4 / turbocharged | |
| Horsepower (gross)* | 65.4 | | 72.1 |
| Horsepower (PTO) | 52 | | 60 |
| Total Displacement (cu. in.) | | 203 | |
| Rated Engine (rpm) | | 2400 | |
| Fuel Tank Capacity (gal.) | | 23.8 | |
| Alternator (amps) | | 130 | |
| Transmission No. of Speeds | | F12 / R12 (option: F18 / R18 with Creep) | |
| Shuttle Shift | | Hydraulic shuttle | |
| 4WD Clutch Type | Electro-hydraulic on-the-go | Mechanical on-the-go | Electro-hydraulic on-the-go |
| Compatible Front Loader | | LA1154 | |
| FRONT LOADER SPECIFICATIONS | | | |
| Maximum Lift Height / Power at Pivot Pin | | 133.0" / 117.6" | |
| Lift Capacity at Pivot Pin (Max Height / Power) (lbs.) | | 2674 / 2928 | |
| Lift Capacity at Pivot Pin (1500 mm height / power) (lbs.) | | 3228 / 3741 | |
| Breakout Force Height / Power (bucket pivot pin) (lbf) | | 4079 / 5128 | |

Comfort. Performance. Efficiency.

- > The spacious Category II cab comes standard with a high visibility roof panel and is designed for optimal functionality
- > Reduces fuel consumption and operating cost
- > With 16.7 gallons per minute of hydraulic flow, operators can complete more work in less time, especially for loader work
- > The interior console light delivers better visibility of controls while operating at night. With an electro hydraulic shuttle and declutch button, Kubota delivers transitions between gears with simplicity and ease
- > Two remote valves, one Self-Canceling Detent and one Float valve, come standard on the Deluxe models
- > The M4 Series tractors are built tough with over 3300 pounds of 3-point lift capacity at 24 in. behind the lift points
- > The instructor seat comes standard on the Deluxe model and is optional on the Standard model



| HYDRAULICS | | | |
|---|--|---------------------|---------------------|
| | M4D-061HDC12 / 4WD | M4-071HDC12 / 4WD | M4D-071HDC12 / 4WD |
| Pump Capacity (3-Point Hitch) (gpm) | 16.7 | | |
| 3-Point Hitch (Category II) | Telescopic lower link ends, telescopic stabilizers | | |
| Control System | Position, draft (top link sensing) & mixed control | | |
| Lift Capacity (lbs.) (24 in. behind lift point ISO) | 3,307 | | |
| Standard Remote Valves | 2 (SCD / FD) Max 3 | 1 (SCD), Max 3 | 2 (SCD / FD), Max 3 |
| PTO Speed (rpm) | 540 / 540E | 540 (540/540E: OPT) | 540 / 540E |
| DIMENSIONS AND WEIGHT | | | |
| Wheelbase | 84.1" | | |
| Overall Width | 75.6" | | |
| Overall Length | 144" | | |
| Overall Height (top of ROPS or cab) | 101" | | |
| Weight (lbs.) | 6117 | | |

UTILITY AG TRACTORS



M5 Series M5-091 | M5-111

| | M5-091 | | | | | | M5-111 | | | | | | |
|---|---------------------------|--------------|-------------------------|---------------------------|--------------|----------------|-------------------------|--------------|-------------------------|---------------------------|--------------|----------------|----------------|
| | HF (Open Station) | HFC (Cab) | HD (Open Station) | HD12 (Open Station) | HDC (Cab) | HDC12 (Cab) | HF (Open Station) | HFC (Cab) | HD (Open Station) | HD12 (Open Station) | HDC (Cab) | HDC12 (Cab) | HDC24 (Cab) |
| 2WD / 4WD | 2WD | | 4WD | | | | 2WD | | 4WD | | | | |
| Engine | V3800CR-TIER4 | | | | | | | | | | | | |
| No. of Cylinders /Aspiration | 4 / turbocharged | | | | | | | | | | | | |
| Horsepower (gross)* | 92.5 | | | | | | 105.6 | | | | | | |
| Horsepower (PTO** at rated engine RPM) | 76 | | | | | | 89 | | | | | | |
| Total Displacement (cu. in.) | 230 | | | | | | | | | | | | |
| Rated Engine (rpm) | 2,400 | 2,600 | 2,400 | | 2,600 | | 2,400 | 2,600 | 2,400 | | | 2,600 | |
| Fuel Tank Capacity (gal.) | 27.7 | | | | | | | | | | | | |
| Alternator (amps) | 60 | 80 | 60 | | 80 | | 60 | 80 | 60 | | | 80 | |
| Transmission No. of Speeds | F8/R8 | | F12/R12 | F8/R8 | F12/ R12 | | F8/R8 | | F12/ R12 | F8/R8 | F12/ R12 | F24/ R24 | |
| Shuttle Shift | Electro-hydraulic shuttle | | | | | | | | | | | | |
| Max. Traveling Speed (mph) | 17.7 | 19.2 | 17.7 | 22.6 | 19.2 | 22.6 | 18.6 | 20.1 | 18.6 | 23.6 | 20.1 | 23.6 | 23.4 |
| Main Clutch Type | Multiple wet disc | | | | | | | | | | | | |
| Compatible Front Loader | LA1854 | | | | | | | | | | | | |

* SAE J1995; ** Internal Kubota Test

Precise. Dynamic. Productive.

- > The M5-091 and M5-111 combine Kubota's DPF (Diesel Particulate Filter) with SCR (Selective Catalytic Reduction) technologies to meet Tier 4 Final regulations

- > Using the Constant RPM Management switch keeps engine revolution constant while reducing drops in PTO speed
- > We bring you luxury with the Ultra Grand Cab II: a fully enclosed cab with air conditioning, a sunroof with a retractable sunshade, rubber cushions under the cab, and an optional instructor's seat for new levels of comfort
- > Electro Hydraulic Shuttle for smooth shifting between forward and reverse eliminates the need to depress the clutch every time you change directions
- > Hydraulic wet disc brakes increase overall tractor longevity
- > Bevel-gear front axle provides greater all-around maneuverability
- > A Category II 3-point hitch allows fast and simple attachment of rear-mounted implements
- > Floating lift rods come standard for a smoother ride and enhanced traction while using the 3-point hitch



HYDRAULICS

| | M5-091 | | | | | M5-111 | | | | | | | |
|--|--|--------------|---------------------------|---------------------------|---------------------------|------------------|-------------------------|---------------------------|-------------------------|---------------------------|--------------|----------------|----------------|
| | HF (Open Station) | HFC (Cab) | HD (Open Station) | HD12 (Open Station) | HDC (Cab) | HDC12 (Cab) | HF (Open Station) | HFC (Cab) | HD (Open Station) | HD12 (Open Station) | HDC (Cab) | HDC12 (Cab) | HDC24 (Cab) |
| Rater Flow at Remote Outlets (gpm) | 15.7 | 17.0 | 15.7 | | 17.0 | | 15.7 | 17.0 | 15.7 | | | 17.0 | |
| 3-Point Hitch (Category II) | Telescopic lower link ends, telescopic stabilizers | | | | | | | | | | | | |
| Control System | Position, draft (top link sensing) & mixed control | | | | | | | | | | | | |
| Lift Capacity (lbs.) (24 in. behind lift point ISO) | 4,630 | | 6,063 | 4,630 | 6,063 | 4,630 | | 6063 | 4,630 | 6063 | | | |
| Standard Remote Valves | 2 (Max 3) | | | | | | | | | | | | |
| PTO Speed (rpm) | 540 ¹ | | 540/ 540E ² | 540 ¹ | 540/ 540E ² | 540 ¹ | | 540/ 540E ² | 540 ¹ | 540/540E ² | | | |

DIMENSIONS AND WEIGHT

| | | | | | | | | | | | |
|--|--------|--------|--------|--------|--|--------|--------|--------|--------|--|--|
| Wheelbase | 90" | | 88.6" | | | 90" | | 88.6" | | | |
| Overall Width | 77.2" | | 78.3" | | | 78.3" | | 79.1" | | | |
| Overall Length | 156.5" | | 155.9" | | | 156.5" | | 155.9" | | | |
| Overall Height (top of Open Station or Cab) | 98.9" | 100.2" | 98.9" | 100.2" | | 99.8" | 101.2" | 99.8" | 101.2" | | |
| Weight (lbs.) | 5,732 | 6,482 | 6,151 | 6,900 | | 5,865 | 6,615 | 6,283 | 7,033 | | |

Optional 540E, Optional 540/1000; 2 – Optional 540/1000

UTILITY AG TRACTORS



M6S Series M6S-111

| | M6S-111SHF (2WD) / SHC (2WD, Cab) | M6S-111SHD (4WD) / SHDC (4WD, Cab) / SHDC2 (4WD, Cab) | M6S-111SDS2 (4WD) / SDSC (4WD, Cab) / SDSC2 (4WD, Cab) |
|---|--------------------------------------|---|--|
| Engine | V-3800-CR-TIEF4 | | |
| No. of Cylinders / Aspiration | 4 / Turbocharger with intercooler | | |
| Total Displacement (cu. in.) | 230 | | |
| Rated Speed (rpm) | 2,600 | | |
| Horsepower (gross)* | 114.1 | | |
| Horsepower (PTO) at rated engine RPM** | 95 | | |
| PTO Speed (rpm) | 540 (540/1000 factory option) | | |
| Fuel Tank Capacity (gal.) | 46.2 | | |
| Alternator (amps) | 80 | | |
| Transmission – No. of Speeds | 16F/16R (24F/24R w/creep) | 32F/32R (48F/48R w/creep) | |
| Shuttle Shift | Electro-hydraulic | | |
| Max. Traveling Speed (mph) | 23.34 (Open Station) / 23.16 (Cab) | | |
| Main Clutch Type | Wet disc electro-hydraulic operated | | |

Economical. Functional. Reliable.

- Technology-driven V-3800 Tier 4 Final engine features a common rail system (CRS), intercooler, and exhaust gas recirculation (EGR), and uses a Diesel Particulate Filter (DPF) and selective catalytic reduction (SCR)
- Design of the main shift lever provides a comfortable, easy-to-use feel and better visibility of the lever's shift stages (Hi-Lo, etc.) to increase operator efficiency
- Swing Shift Plus Transmission models give you 32F/32R speeds and allow you to operate the Swing Shift as well as the dual speed with just one lever
- De-clutch button is available on all models, allowing you to shift a gear without using the clutch pedal
- This tractor is ready to accept implements requiring multiple valves with the M6S now having two standard rear remote valves — one self-canceling detent valve and one floating detent valve — and an optional third remote valve

HYDRAULICS

| | M6S-111SHF (2WD) / SHC (2WD, Cab) | M6S-111SHD (4WD) / SHDC (4WD, Cab) / SHDC2 (4WD, Cab) | M6S-111SDS2 (4WD) / SDSC (4WD, Cab) / SDSC2 (4WD, Cab) |
|---|--|--|---|
| Type | Internal cylinder (external cylinder option) | | |
| Control System | Top link | | |
| Lift Capacity (lbs.) (24 in. behind lift point OECD) | 3,858 (5732 optional) | | |
| Rear remotes | 2 standard (3rd optional) | | |

DIMENSIONS AND WEIGHT

| | | |
|--|------------------------------------|---------------|
| Wheelbase | 95.9" | |
| Overall Width (min. tread) | 91.5" (Open Station) / 92.5" (Cab) | |
| Overall Length | 163.2" | |
| Overall Height (top of Open Station / Cab) | 105.1" / 105.5" | |
| Weight (Open Station / Cab) (lbs.) | 6,834 / 7,341 | 8,466 / 8,973 |



UTILITY AG TRACTORS



M6 Series M6-101-1 | M6-111-1 | M6-131-1 | M6-141-1

| | M6-101-1 | M6-111-1 | M6-131-1 | M6-141-1 |
|-------------------------------|---|----------|-----------------|----------|
| Engine | V3800-TI-CRS | | V6108-TI-CRS | |
| No. of Cylinders / Aspiration | 4 Cylinder 3.8L | | 4 Cylinder 6.1L | |
| Total Displacement (cu. in.) | 230 | | 374 | |
| Rated Speed (rpm) | 2,600 | | 2,200 | |
| Horsepower (gross)* | 104.5 | 114.1 | 131.6 | 141.4 |
| Horsepower (PTO)** | 82 | 92 | 104 | 114 |
| Fuel Tank Capacity (gal.) | 50.2 | | | |
| Alternator (amps) | 130 | | | |
| Transmission – No. of Speeds | Intelli-Shift – 24F/24R (32F/32R w/creep) | | | |
| Main Gear Shift | 8-speed power shift | | | |
| Range Gear Shift | 3-speed mechanical | | | |
| Shuttle Shift | Microprocessor-controlled electro-hydraulic shuttle | | | |
| Max. Traveling Speed (mph) | 20.72 | | 22.73 | |
| Main Clutch Type | Multiple wet disc | | | |

* SAE J1995 **The M6-101 is tested per internal Kubota test.
All others tested per OEDC Code 2

Powerful. Flexible. Optimal.

- > Measuring 65.5" by 61.4", the Grand X Cab offers more headroom and legroom for a higher level of comfort and greater visibility than previous models
- > All M6 models include the 24F/24R Intelli-Shift® Transmission, featuring an 8-speed power shift with a 3-speed hi/mid/low range for 24 gears in forward and reverse
- > Tilt and telescopic power steering
- > When the M6 Series' Work Kruiise is turned on, there is no need for throttle adjustment
- > A Kubota-exclusive bevel-gear front axle ensures easy tight-turning radius and excellent maneuverability
- > M6 series tractors have 18.7 gpm (M6-101/M6-111) and 20.4 gpm (M6-131/M6-141) hydraulic pumps
- > The M6-141 DTSC-F model comes with a front suspended axle which provides the operator with a smoother ride, increased tractor stability and higher productivity
- > M6 Series New Features include:
 - Xpress Restart
 - Shuttle Shift Modulation
 - Stationary PTO
 - Updated Loader Joystick
 - Updated Shuttle Lever



HYDRAULICS

| | M6-101-1 | M6-111-1 | M6-131-1 | M6-141-1 |
|---|--|----------|----------|----------|
| 3-Point Hitch (Category II) | Telescopic lower link ends, telescopic stabilizers | | | |
| Control System | Electronic draft control, lower link sensing | | | |
| Lift Capacity (lbs.) (24 in. behind lift point OECD) | 6,834 (9,447 optional) | | | |
| Remote Valves (mechanical) | 2 standard (3rd, 4th optional) w/built-in flow control | | | |
| PTO Speed (rpm) | 540/1,000 | | | |

DIMENSIONS AND WEIGHT

| | M6-101-1 | M6-111-1 | M6-131-1 | M6-141-1 |
|-----------------------------------|----------|----------|----------|-----------------|
| Wheelbase | 95.9" | | 105.9" | 105.9" / 105.5" |
| Overall Width (min. tread) | 82.7" | | 85.8" | |
| Overall Length | 165.4" | | 171.7" | 171.7", 171.3" |
| Overall Height | 109.8" | 111.8" | | 113.2" |
| Weight (lbs.) | 9,601 | 9,788 | 10,945 | 10,945 / 11,387 |

FRONT LOADER SPECIFICATIONS

| | LA1955*** | LA2255*** |
|--|--------------------------------|--------------------------------|
| Maximum Lift Height | 145.7" | 161.4" |
| Overall Height in Carrying Position | 66.9" | 74" |
| Lift Capacity at High Position (full height @ pivot pin) (lbs.) | 4,299 | 4,877 |
| Roll Back Angle | 40 | |
| Maximum Dump Angle | 63° / 52° (at height position) | 60° / 50° (at height position) |

*** Euro Quick Attach Coupler Type optional

AG TRACTORS



M7 Series Tractors M7-134 | M7-154 | M7-174

| Model | M7-134 | M7-154 | M7-174 |
|---|---|------------|------------|
| Engine | V6108-CR- TIER 4 FINAL | | |
| Type | Direct Injection, with Intercooler turbocharger, water-cooled 4 cycle diesel engine | | |
| No. of Cylinders | 4 Cylinder 6.1L | | |
| Total Displacement (cu. in.) | 374 | | |
| Max Engine Power* (97/68EC) HP@RPM | 128 @ 1900 | 148 @ 1900 | 168 @ 1900 |
| Boost HP | 20 | 20 | 5 |
| Rated PTO HP @ 2000 engine RPM* (OECD Code 2) | 100 | 120 | 140 |
| Alternator (amps) | 200 Amp | | |
| Fuel Tank Capacity (gal.) | 87 | | |
| DEF Tank Capacity (gal.) | 10 | | |

| GRADE | DELUXE | PREMIUM | PREMIUM KVT |
|-------------------|--|---------|-------------|
| Transmission Type | Semi-Powershift | | CVT |
| Main Gear Shift | 6-Speed Powershift | | CVT |
| Range Gear Shift | 5-Speed Synchronized (GST) | | CVT |
| No. of speeds | F30 / R15 (F54 / R27 w/optional creep) | | CVT |
| Shuttle Shift | Electro-hydraulic shuttle | | |
| Main Clutch | Hydraulic multi-plate wet disc | | |

M7 Series Tractors: More power, productivity, and comfort with the same Kubota quality, as well as new options and features for your operation.

- > M7 Gen 4 Deluxe models with high performing CCLS hydraulics, mechanical rear remotes, and optional bar axles. High performance with less electronics and simplified controls
- > 30 x 15 with available factory installed creep for a total of 54 forward gears, transmissions with 5 ranges and 6 speeds. Widening the working range for increased in-field performance. Enhanced auto shifting with Range Advance for better travel operation
- > The Kubota V6108 engine has redefined torque curves and operates at a lower RPM
- > Improved KVT transmission control with a more responsive multifunction handle and smoother shuttle operation
- > All M7 Gen 4 tractors have loader ready features standard
- > Optional front field installed and PTO available on all M7 Gen 4 °models
- > 7" K-Monitor and optional 12" K-Monitor Pro add fingertip control for all tractor functions and ISOBus compatibility on all Premium and Premium KVT tractors
- > Models Available:
 - M7-134, M7-154, & M7-174 Deluxe
 - M7-154 & M7-174 Premium
 - M7-154 & M7-174 Premium KVT
- New features:
 - Xpress Restart (Deluxe & Premium)
 - Shuttle Shift Modulation
 - LED Lights are standard on Premium & KVT, optional on Deluxe
 - Stationary PTO
 - Multi-Speed Steering
 - LM2606 Loader
 - Loader Joystick (Deluxe)

| HYDRAULICS | | | |
|--|--|--------|--------|
| Model | M7-134 | M7-154 | M7-174 |
| Hydraulic System | Closed center, load sensing (CCLS) | | |
| Pump Capacity (gpm) | 29 | | |
| 3-Point Hitch | Telescopic lower link, Category 3, 3N | | |
| Control System | Electronic draft control / Lower-link sensing | | |
| Lift Capacity at 24" (lbs.) | 11,797 | | |
| No. of Remote Valves | Deluxe: 3 Standard up to 4 Mechanical Premium & KVT: 4 standard up to 5 Electronic | | |
| Rear PTO Speed (rpm) | 540 / 540E / 1000 / 1000E | | |
| Front PTO Speed (rpm) | 1000 | | |
| Rear Axle Type | Flanged axle or 110" bar axle | | |
| DIMENSIONS AND WEIGHT | | | |
| Overall Length (in.) | 188" | | |
| Overall Height (in.) | 121.7 | | |
| Overall Width (in.) | Deluxe Models: 98.4" or 110" Premium & KVT: 110" | | |
| Wheelbase (in.) | 107" | | |
| Weight (lbs.) | 14,456 | | |
| LOADER | | | |
| Model | LM2606 Mechanical self-leveling loader, with Z-bar linkage | | |
| COMPATIBILITY | | | |
| Control Type | Mechanical (Deluxe), Electronic (Premium/KVT) | | |
| Max. Lift Height at Pivot Pin | 167" | | |
| Lift Capacity at 800 mm forward Forward (lbs.) (max. height) | 5765 | | |
| Standard Equipment | Third function valve, Single-lever hydraulic quick coupler, Accumulator (KSR: Kubota Shockless Ride) | | |

* SAEJ1995; OECDC Code 2;



M8 Series Tractors M8-181 | M8-201

Built Right. Built Ready.

- > The M8 Series is a 200-horsepower tractor engineered to power through a wide range of jobs. From cutting, tedding, raking and baling hay to material handling, tillage, planting and more— this durable tractor is built right, built ready for business all year round
- > Stay comfortable in the cab with an easily accessible A/C, radio and lights. The cab provides multiple power and charging outlets for most any device
- > The M8 Series is paired with a formidable Cummins B6.7L Performance Series engine that is available in 180 and 200 horsepower featuring an EGR-free design to enhance fuel efficiency and lower emissions
- > The M8 series is customizable to your needs. Combining precision and speed, the M8 comes with reliable hydraulics, and a 3-point hitch that offers flexibility and strength. The 3-point hitch can lift mounted equipment and handle a wide range of implements

| ENGINE | | |
|---|---|--------|
| Model | M8-181 | M8-201 |
| Engine | Cummins B6.7 Tier 4 Final / Stage V | |
| No. of Cylinders | 6 cylinders | |
| Fuel Tank Capacity (gal.) | 99 gallons; 375 Liters | |
| DEF Tank Capacity (gal.) | 9 gallons; 35 Liters | |
| Rated Engine Horsepower* @ 2100 Engine RPM HP | 180 | 200 |
| PTO | | |
| Rated PTO Horsepower** @ 2000 Engine RPM HP | 145 | 159 |
| Responsive Power Delivery Boost | Additional 25 HP | |
| Rear PTO Types | 540 6 Spline & 1,000 21 Spline (Optional 1,000 - 20 Spline) | |
| Rear PTO Speed (rpm) | 540/540E/1,000/1,000E | |

| TRANSMISSION | | |
|--|---|--------|
| Model | M8-181 | M8-201 |
| Transmission Type | Semi-Powershift 30F x 15R - 6 Gearx 5 Ranges | |
| KVT | CVT | |
| Max. Traveling Speed - MPH (KM) | 24.8 (40) (Optional 31 (50)) | |
| HYDRAULICS | | |
| Hydraulic System | Closed center, load sensing (CCLS) | |
| Standard Implement Pump Flow gpm (ℓ/min) | 31.7 (120) | |
| Optional Implement Pump Flow gpm (r/min) | 42.2 (160) | |
| No. of Remote Valves | 3 standard, up to 5 | |
| Trailer Brake | (Hydraulic) Optional | |
| Drawbar Category | CAT III (Optional CAT IIIHD) | |
| Lift Cap, 24" Behind Lift Points (OECD)' lbs. (kg) | 11,200 (5,080) | |
| Rear 3-Pt Hitch Optional: Lift Capacity (OECD)' lbs. (kg) | 13,600 (6,170) | |
| FRONT 3-PT HITCH | | |
| Front 3-Point Hitch | Optional | |
| Lift Capacity at Hooks (OECD)' lbs. (kg) | 8,818 (4,000) | |
| REAR AXLE | | |
| Bar Axle 98" Overall Length | Standard | |
| Bar Axle 118" Overall Length | Optional | |
| CAB | | |
| K-Monitor | 7" K-Monitor Standard, (12" K-Monitor Pro Optional) | |
| Exterior Lighting | Exterior Lighting Standard 8 Halogen (Optional 12 Halogen) (LED Lighting Optional 12 LED) | |
| DIMENSIONS AND WEIGHT | | |
| Height in. (mm) | 128" (3,250) | |
| Wheel base in.(mm) | 114" (2,895) | |
| Measurement Avg Shipping Weight lbs. (kg) | 19,510 (8,850) | |
| LOADER | | |
| Model | M77 mechanical self-leveling (MSL) | |
| Leveling System | Mechanical self-leveling (MSL) | |
| Control Type | Electrical Joy Stick | |
| Standard Equipment | Third function valve, Hydraulic valve quick couplers, Accumulator (KSR: Kubota Shockless Ride) | |
| Max Lift Height | To Pivot Pin in. (mm) 181.2 (4,600) Under Level Bucket in. (mm) | |
| Lift Capacity** | (Pivot Pin, Max. Height) lbs. (kg) 5,200 (2,360) (800mm Forward, Max. Height) lbs. (kg) 5,490 (2,490) (Pivot Pin, Ground Level) lbs. (kg) 6,940 (3,150) (800mm Forward, Ground Level) lbs. (kg) 6,590 (2,990) Breakforce Force (800mm Forward, Ground Level) lbs. (kg) 10,140 (4,600) | |

*Factory estimated rating. Kubota Tractor Corporation and Kubota Canada Ltd. reserve the right to change the stated specifications without notice. This material is for descriptive purposes only and reasonable efforts were used to set forth the contained information; some items shown may be optional and some products shown may not be available at all dealerships. Kubota disclaims all representations and warranties, express or implied, or any liability from the use of this material. For complete warranty, safety and product information, consult your local Kubota dealer and the operator's manual. Power (HP/KW) and other specifications are based on various standards or recommended practices. For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications. This material is intended for the United States, US territories, and Canada only. For information regarding Kubota products or services outside these areas, see Kubota Corporation's global web site. Kubota does not provide parts, warranty or service for any Product which is re-sold or retailed in any country other than the country for which the Product(s) were designed or manufactured.

**Loader lift capacity is limited by GVW and proper ballasting.

UTILITY/SPECIALTY AG TRACTORS



Narrow Models

M4N-071 | M5N-091/111 | M5N-091PK - CAB
M4N-071 | M5N-092/112 - Open Station

Capable. Compact. Nimble.

- › Narrow models (M4N-071 | M5N-091PK | M5N-091/111 Cab | M5N-111 | M5N-092/112 Open Station) measure just 48" outside to outside at rear axle with standard tires
- › The 4WD M5N-091PK (Power Krawler), with its powerful engine and independently oscillating left and right rear tracks, provides excellent traction and sure-footed climbing in vineyards and other hilly terrain
- › Electro-hydraulic Shuttle Transmission is standard on all M Series models and makes shifting between forward and reverse a smooth and quick operation
- › Bevel gear front wheel drive with bi-speed turn on the M Series narrow tractors delivers strength, maneuverability, and durability
- › Automatic 4WD braking on all M4N/M5N models from 2WD mode
- › The M4N and M5N have a V-3800 Tier 4 engine, increased alternator capacity, larger radiator, larger diameter cooling fan, and RPM memory for repetitious actions compared to previous models
- › To promote operator efficiency, all main controls are on the right-hand side of the operator while the steering wheel now has up to 25 degrees of tilt
- › Tracks offer an alternative to keep the narrow profile of the tractor while in the field

Narrow Models

| | M4N-071 HD12 / HDC12 | M5N-091PK Power Krawler | M5N-091HDC12 M5N-091HDC24 M5N-092HD12 M5N-092HD24 | M5N-111HDC12 M5N-111HDC24 M5N-112HD12 M5N-112HD24 |
|--|---|---|--|--|
| Engine Type (Kubota, liquid-cooled, diesel) | CRS, Direct Injection, 4-cylinder, turbocharged, Tier 4 | CRS, Direct Injection, 4-cylinder, turbocharged w/ intercooler, Tier 4 | | |
| Horsepower (gross)* | 72.6 | 92.5 | | 105.7 |
| Horsepower (PTO)** | 61 | 78 | HD(C)12: 78 HD(C)24: 75 | HD(C)12: 91 HD(C)24: 88 |
| Displacement (cu. in.) | 230 | | | |
| Alternator (amps) | 100 (130 opt. on cab model) | 80 (130 opt. on cab models) | | |
| Transmission (fully synchronized) | F12/R12 (F18/R18 w/ creep) | | HD(C)12: F12/R12 (F18/R18 w/ creep) / HD(C)24: F24/R24 (F36/R36 w/ creep) | |
| Height (top of hood / cab) | 54.7" / 90.2" | N/A / 93.3" | 59.8" / 90.2" | |
| Overall Width (ROPS / cab) | 51.6" / 53.9" | N/A / 48" | 53.5" / 53.9" | |
| Overall Length | 147.6" / 149.2" | | 155.5" | |
| Crop Clearance (front axle) | 12" (ROPS) / 14.6" (cab) | | | |
| Wheelbase | 83.9" | | | |
| Tractor Weight (ROPS/cab) (lbs.) | 5,049 / 5,291 | N/A / 7,275 | 5,357 / 5,622 | |

* SAE J1995; ** OECD Code 2



UTILITY/SPECIALTY AG TRACTORS



Low-Profile¹ Models M5L-111 | M6L-111

Robust. Anchored. Gentle.

- › Designed specifically for fruit and nut orchard applications, the M Series low-profile tractors are versatile enough to be used in poultry operations where low clearance operation is required
- › The M5L and M6L are equipped with a Kubota turbocharged V3800 Tier IV Final engine, which has a common rail system (CRS), intercooler, and exhaust gas recirculation (EGR), as well as a diesel particulate filter (DPF) and a selective catalytic reduction (SCR) system
- › An RPM Memory switch recalls preferred engine RPM with the touch of a button, and Constant RPM Management keeps the engine speed constant for stable operation
- › To promote operator efficiency and comfort, all controls are conveniently located on the right side, the floor pedals have been adjusted for better comfort, and the floor area has been increased along with ergonomic steps
- › Right-hand steel operator's guard helps keep low hanging branches from contacting the operator or inadvertently contacting critical controls
- › Kubota continues to use heavy-duty, wide steel fenders along with a steel sloping hood designed to reduce crop damage and gently deflect the branches of trees while protecting the operator and key controls
- › Lowered ROPS frames reduce the total height of the M5L to 66.3" and the M6L to a height of 89" with standard tires

Low-Profile¹ Models

| | M5L-111 | M6L-111 |
|---|---|---------------------------|
| Engine Type (Kubota, liquid-cooled, diesel) | V3800-TIEF4, CRS, Direct Injection, 4-cylinder, turbocharged, w/intercooler | |
| Horsepower (gross)* | 105.6 | 114.1 |
| Horsepower (PTO)** | 89 | 95 |
| Displacement (cu. in.) | 230 | |
| Alternator (amps) | 60 (80 amp opt.) | 80 |
| Transmission (fully synchronized) | F12/R12 (F18/R18 w/creep) | F32/R32 (F48/R48 w/creep) |
| Traveling Speed (mph) | 20.1 | 0.86–18.56 |
| Height (front of hood) | 90.6" (ROPS) / 66.3" (ROPS folded) | 89.4" (ROPS) |
| Overall Width | 77.6" | 83.5" |
| Overall Length | 155.9" | 163.2" |
| Crop Clearance (front axle) | 16.3" | 18.5" |
| Wheelbase | 88.6" | 95.9" |
| Tractor Weight (lbs.) | 5,908 | 7,077 |
| Front Loader | LA1854 | LA1944A |

1 - Based on Kubota specifications; * SAE J1995; ** OECD Code 2



UTILITY/SPECIALTY AG TRACTORS



High-Clearance Models M6H-101

Elevated. Maneuverable. Agile.

- › The M6H-101 is designed for high crop clearance—With 25.8" ground clearance the M6H-101 will clear crops, and ensure less damage, meaning more productivity for you
- › Slow ground speed is key in most high-clearance, specialty crop applications—with a standard, factory-installed creep speed, the M6H-101 has a minimum ground speed of 0.11 MPH at rated engine RPM
- › A 24-speed transmission gives the operator a wide variety of speed selections: from creep speed in the field, to high range on the road, the M6H's 3-range, 8-gear transmission will match the proper speed to the task being taken on
- › A left-hand, electro-hydraulic shuttle makes changing directions simple, with fingertip control
- › The M6H-101 comes with 2 standard rear remote valves, a self-canceling detent, and float detent—with 17.6 gpm of hydraulic flow, the M6H is ready to be productive, straight from the factory

High-Clearance Models

M6H-101

| | |
|--|---|
| Engine Type (Kubota, liquid-cooled, diesel) | V3800-TIEF4, 4 cylinders in-line, common rail system, direct injection, DPF, DOC, SCR |
| Horsepower (gross)* | 104.4 |
| Horsepower (PTO) at rated engine RPM | 84 |
| Displacement (cu. in.) | 230 |
| Alternator (amps) | 80 |
| Transmission (fully synchronized) | F24/R24 w/creep |
| Traveling Speed (mph) | 0.11–16.37 |
| Overall Height (ROPS unfolded) | 111.6" |
| Overall Width | 79.9" |
| Overall Length | 168.3" |
| Minimum Ground Clearance*** | 25.8" |
| Wheelbase | 95.3" |
| Standard Tire Size | 13.6-38 |
| Tread Width (front)*** | 61.6", 65.6", 72.0", 75.8", 79.7" |
| Tread Width (rear)*** | 60.8", 64.8", 73.4", 77.2", 81.1" |
| Weight (lbs.) | 8,157 |



* SAE J1995



Disc Mowers

DM1017 | DM1022 | DM1024 | DM2028 | DM2032
DM3087 | DM4032 | DM5028 | DM5032 | DM5040

The tough and reliable Disc Mower Series is built with no compromises for maximum cutting performance.

- › Fully-welded cutterbar with overlapping C-channels
- › With 3 blades and counter rotating discs, Kubota mowers have one blade in the crop at all times. This makes for a cleaner cut, uses less horsepower and prolongs blade life
- › Even number of counter-rotating discs allows for improved overlap and a smooth, even crop flow
- › Specially machined gears with a rounded design and long teeth allow for quiet operation and efficient smooth power transmission
- › DM Series disc mowers offer flexible suspension, well-suited for work on slopes and hilly conditions
- › DM5000 Series mowers offer larger working widths, while its trailed-type design is ideal for lower HP tractors
- › All disc mowers come with a 2 year limited warranty and a 3 year limited warranty on gear boxes and cutter bars

Disc Mowers

| | DM1017 | DM1022 | DM1024 | DM2028 | DM2032 | DM3087 | DM4032 | DM5028 | DM5032 | DM5040 | |
|-----------------------------------|--------------------------------|---------|--------|--------|--------|---------------------|-------------|--------------------------------|--------|--------|--|
| Cutting Width | 5' 6" | 7' 2" | 7' 10" | 9' 2" | 10' 6" | 28' 7" | 10' 6" | 9' 2" | 10' 6" | 13' 1" | |
| Weight (approx., lbs.) | 915 | 1058 | 1091 | 1426 | 1508 | 3420 | 1566 | 2734 | 2756 | 2778 | |
| Transport Width | 3' 9" | | 4' 7" | | | 9' 7" | 9' 10" | 8' 6" | 9' 10" | 12' 5" | |
| ATTACHMENT | | | | | | | | | | | |
| Hitch Option | Cat. I | Cat. II | | | | Cat. II, III | Cat. II | | | | |
| Drawbar Hitch | N/A | | | | | | Standard | | | | |
| PTO (rpm) | 540 | | | | 1,000 | | 540 | | | | |
| Min. PTO Horsepower Req. | 36 | 42 | 46 | 50 | 55 | 120 | 40 | 45 | 65 | 85 | |
| OPERATION | | | | | | | | | | | |
| Number of Discs and Blades | 4/12 | 6/18 | | 8/24 | | 16/48 | | 8/24 | | 10/30 | |
| Remotes | 1 | | | | 2 | | 1 | 2 | | | |
| Cutter Bar Operating Range | ±45° | | | ±35° | | | ±17° | | | | |
| Stubble Height | 0.78"–1.97" | | | | | | 1.25"–3.25" | | | | |
| OPTIONAL EQUIPMENT | | | | | | | | | | | |
| Swath Boards (RH) | Standard | | | | | Optional | | | | | |
| Swath Discs (RH/LH) | Optional / N/A | | | | | Optional / Optional | | N/A | | | |
| High Skids | Standard / Optional / Optional | | | | | Optional | | Standard / Optional / Optional | | | |
| Road Lighting Kit | Optional | | | | | Standard | | | | | |

A Frame Mounting Kit required DM4032. N/A to all other models.





Trailed Disc Mower Conditioners

DMC8028T | DMC8028R | DMC8032T | DMC8032R
DMC8036T | DMC8036R | DMC8532T | DMC8532R
DMC8536T | DMC8536R | DMC8540T | DMC8540R
DMC8547R | DMC8547T

Kubota Disc Mower Conditioners feature a full range of side pull and center pivot models, along with industry leading features, for quick & efficient hay harvesting.

- › DMC8000 and DMC8500 series range from 9' 2" to 15' 6" working width
- › Choose between a left-hand drawbar or center-pivot models
- › Long, curved gears run smoothly in oil and make for a low-noise cutter bar
- › Counter-rotating discs helps improve overlap and ensures an even flow of crop into the conditioning unit
- › Full width conditioning helps ensure an evenly conditioned crop as well as a consistent windrow
- › The welded cutterbar is protected with built in shear protection in each hub, providing for optimal protection from contamination reaching the internal gears
- › With 3 blades and counter rotating discs, Kubota mowers have one blade in the crop at all times
- › Kubota's patented SemiSwing tine conditioning system allows for more consistent conditioning action in a wide variety of crop conditions
- › Chevron roller conditioners with full width conditioning provide gentle yet effective conditioning of fragile crops
- › All DMCs come with a 2 year limited warranty and a 3 year limited warranty on gear boxes and cutter bars

Mounted Disc Mower Conditioners

DMC6332R | DMC6332T | DMC6336TVARIO
DMC63100R | DMC63100T | DMC7332R
DMC7332T | DMC7336R | DMC7336T

- › DMC7300 front and DMC6300 rear 3-point series mowers range from 10'6" to 33'6" working width
 - › Cutterbar gear protection is done to top service hubs that have a built in shear protection and are designed for easy maintenance
 - › Long, curved gears run smoothly in oil and make for a low-noise cutter bar
 - › With 3 blades and counter rotating discs, Kubota mowers have one blade in the crop at all times. This makes for a cleaner cut, uses less HP and prolongs blade life
 - › Counter-rotating discs improve overlap and ensure an even flow of crop into the conditioning unit
 - › Full width conditioning helps ensure an evenly conditioned crop as well as a consistent windrow
 - › Kubota's patented SemiSwing tine conditioning system allows for more consistent conditioning action in a wide variety of crop conditions
 - › Chevron roller conditioners with full width conditioning provide gentle yet effective conditioning of fragile crops
 - › All DMCs come with a 2 year limited warranty and a 3 year limited warranty on gear boxes and cutter bars
- * Visit www.kubotausa.com/service-support/warranty/limited-warranty for further details



HAY TOOLS



Disc Mowers Conditioners

| | DMC 8028T | DMC 8028R | DMC 8032T | DMC 8032R | DMC 8036T | DMC 8036R | DMC 8532T | DMC 8532R | DMC 8536T | DMC 8536R | DMC 8540T | DMC 8540R | DMC 8547R | DMC 8547T | |
|-------------------------------|------------|--------------|------------|--------------|------------|--------------|--------------|--------------|------------|--------------|------------|--------------|--------------|------------|--|
| Drawbar | Left Hand | | | | | | Center Pivot | | | | | | | | |
| Conditioner | Semi Swing | Roller cond. | Semi Swing | Roller cond. | Semi Swing | Roller cond. | Semi Swing | Roller cond. | Semi Swing | Roller cond. | Semi Swing | Roller cond. | Roller cond. | Semi Swing | |
| Cutting Width | 9' 2" | | 10' 6" | | 11' 5" | | 10' 6" | | 11' 5" | | 13' 1" | | 15' 5" | | |
| Weight (approx., lbs.) | 4354 | 4712 | 4420 | 4817 | 4736 | 4938 | 5225 | 5401 | 5349 | 5546 | 5513 | 5976 | 7585 | 7365 | |
| Transport Width | 8' 10" | | 9' 8" | | 11' 2" | | 9' 10" | | 11' 2" | | | | 12' 6" | | |

ATTACHMENT

| | | | | | | | | | | | | | | | |
|---|--|--|-------|--|-------|--|--|--|--------|---------------|--------|--|--|--|--|
| Hitch | Drawbar Hitch Standard / Cat. II Swivel Hitch Optional | | | | | | Cat. II Swivel Hitch Standard / Drawbar Hitch Optional | | | | | | | | |
| PTO (rpm) | 540 Standard / 1000 Optional | | | | | | 1000 Standard / 540 Optional | | | 1000 Standard | | | | | |
| Min. PTO Horsepower Req. (hp/kW) | 70/50 | | 80/60 | | 80/60 | | 90/66 | | 100/74 | | 120/90 | | | | |

OPERATION

| | | | | | | | | | | | | | | |
|------------------------------|-------------------------|-----|---------|-----|---------|-----|---------|-----|---------|-----|---------|-----|----------|-------------|
| Number of Discs | 8 | | 10 | | 8 | | 10 | | 12 | | | | | |
| Remotes Double Acting | 2 | | | | | | | | | | | | | |
| Stubble Height | 1.25" - 3.25" | | | | | | | | | | | | | |
| Cond. Rotor Speed | 900/600 | 900 | 900/600 | 900 | 900/600 | 900 | 900/600 | 900 | 900/600 | 900 | 900/600 | 900 | 900/1200 | 450/600/900 |
| Tires | 31 x 13.5 - 15 Standard | | | | | | | | | | | | | |

OPTIONAL EQUIPMENT

| | | | | | | | | | | | | | | |
|------------------------------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|--|
| Wide Spreading Kit | Optional | | | | | | | | | | | | | |
| High Skids | Optional | | | | | | | | | | | | | |
| Lighting Kit | Standard | | | | | | | | | | | | | |
| Alternative Cond. Speed Kit | 1015/500 | 1200/750 | 1015/500 | 1200/750 | 1015/500 | 1200/750 | 1015/500 | 1200/750 | 1015/500 | 1200/750 | 1015/500 | 1200/750 | 1015/500 | |



Disc Mowers Conditioners

| | DMC 6332R | DMC 6332T | DMC 6336T VARIO | DMC 7332T | DMC 7332R | DMC 7336T | DMC 7336R | DMC 63100T | DMC 63100R |
|-------------------------------|--------------|------------|-----------------|-----------|--------------|------------|--------------|--------------|--------------|
| Conditioner | Roller cond. | Semi Swing | | | Roller cond. | Semi Swing | Roller cond. | Semi Swing | Roller cond. |
| Cutting Width | 10'6" | | 11'5" | 10' 6" | | 11' 5" | | 32' – 33' 6" | |
| Weight (approx., lbs.) | 3219 | 3086 | 3351 | 2756 | 2835 | 3042 | 3175 | 6798 | 7033 |
| Transport Width | 9'10" | | | | | 11' 6" | | 9' 6" | |

ATTACHMENT

| | | | | | | | | | |
|---|-------------|--|--------|--|-------|--|-------|--|---------|
| Hitch | Category II | | | | | | | | |
| PTO (rpm) | 1000 | | | | | | | | |
| Min. PTO Horsepower Req. (hp/kW) | 90/66 | | 120/90 | | 75/55 | | 80/60 | | 200/150 |

OPERATION

| | | | | | | | | | |
|--------------------------|-------------|--|----------|---|------|--|----------------|--|----------------|
| Number of Discs | 8 | | 10 | | 8 | | 10 | | 2x10 |
| Remotes | 2 | | | 1 | | | 1 Power Beyond | | |
| Stubble Height | 1.25"-3.25" | | | | | | | | |
| Cond. Rotor Speed | 950 | | 1000/700 | | 1000 | | 950 | | 1000/700 950 |

ACCESSORIES

| | | | | | | | | | |
|------------------------------------|----------|--|----------|--|--|--|--|--|--|
| Wide Spreading Kit | Optional | | | | | | | | |
| High Skids | Optional | | | | | | | | |
| Lighting Kit | Standard | | | | | | | | |
| Alternative Cond. Speed Kit | 1200/750 | | 1015/500 | | | | | | |

A Frame Mounting Kit - Required DMC7332,7336, NA for all other models.



Tedders

TE4052T | TE6576CD | TE8590C | TE10511C | TE12513C | TE14515C

Speed up your drying process with Kubota's versatile range of FarmLine and ProLine tedders.

- › Kubota tedders have working widths that range from 17' 1" to 36' 1"
- › Our symmetric Kubota Super-C tines allow for an efficient and even-spread crop flow that helps ensure a uniform and consistent drying of crop
- › Kubota Super-C tines are made from 0.39" shot-peened spring steel, and the spring coil diameter has a 20% larger diameter than conventional designs
- › FarmLine tedders are fitted with a 1 time per season maintenance gearbox and the ProLine series is fitted with a maintenance free gearbox
- › Kubota's FarmLine tedders feature a pull-type design, making it the ideal tool for low-horsepower tractors
- › Kubota's ProLine tedders offer unique transport solutions — with hydraulically controlled transport wheels, these machines can quickly move from one field to another

Tedders

| | TE4052T | TE6576CD | TE8590C | TE10511C | TE12513C | TE14515C |
|---------------------------------|----------|----------|---------|----------|----------|----------|
| Kubota Model | FarmLine | ProLine | ProLine | | | |
| Working Width | 17' 1" | 25' 7" | 29' 6" | 36' 9" | 43'11" | 51'2" |
| Transport Width | 9' 6" | 9' 9" | 9' 6" | 9' 7" | 9'8" | |
| Transport Length | 9' 6" | 14' 9" | 13' 8" | 13' 9" | 22'2" | |
| Storage Height | 8' 8" | 13' 7" | 12' 2" | 12' 9" | | |
| Weight (approx., lbs.) | 1014 | 2822 | 3747 | 4905 | 8378 | 9150 |
| Capacity Theor (acres/h) | 10.4 | 15.1 | 7.2 | 9.8 | 10.7 | 12.5 |

ATTACHMENT

| | | | | | | |
|---------------------------------------|----------|-------------|----------|----------|-----|--|
| 3-Point, Trailing | N/A | | | | | |
| Linkage Drawbar | Standard | N/A | | | | |
| 2-Point, Linkage Arms | N/A | Category II | | | N/A | |
| Vibration Damper/Integral Lock | N/A | | Standard | N/A | | |
| Linkage Drawbar Eye | N/A | | | Standard | | |

ROTORS, TINES, GUARDS

| | | | | | | |
|---|----------|----------|---|----|----|----|
| Number of Rotors | 4 | 6 | 8 | 10 | 12 | 14 |
| Number of Tine Arms/Rotor | 6 | 7 | 6 | | | |
| Tine Adjustment System | Standard | | | | | |
| Adjustment of Spreading Angle | N/A | Standard | | | | |
| Cab Contr. Border Tedding System – Mech. | N/A | | | | | |
| Cab Contr. Border Tedding System – Hydr. | N/A | Standard | | | | |
| Reduc. Gearbox for Night Swaths | Optional | | | | | |

TIRES, AXLES, LIGHTS

| | | | | | | |
|---|------------|--------------|-------------------|----------|--------------|--|
| Wheels | 16 x 6.5-8 | | | | | |
| Tires on Central Unit | N/A | 18.5 x 8.5-8 | 18.5 x 8.5-8 | | 11.5/80-15.3 | |
| Front Wheel (16 x 6.5-8) | N/A | Standard | Optional (Tandem) | Optional | N/A | |
| Tandem Axles | Optional | N/A | Optional | | N/A | |
| Warning Panels | Optional | N/A | Standard | | N/A | |
| Warning Panels w/Integrated Lighting | Optional | Standard | | | | |



Rotary Rakes

RA1035 | RA1042T | RA1047T | RA2071T EVO
RA2072 | RA2076 | RA2577 | RA2584

Kubota patented TerraLink frame system ensures complete gathering of the crop & ideal windrows, in virtually any crop & condition.

- › Kubota rakes are equipped to perform with up to 13 double tangential tine arms and up to 5 double tines per arm which ensures a uniform swath for faster drying and even feeding into the baler
- › Kubota's rakes feature TerraLink Quattro flexibility system, which allows the rake to follow a variety of ground contours
- › All FarmLine rakes feature 0.35" wire diameter tines
- › A maintenance-friendly FarmLine rotor head operates within a fully enclosed oil-filled housing
- › All ProLine rakes feature heavy-duty 0.39" diameter wire tines
- › All ProLine machines come standard with the renowned fully enclosed gearbox and its maintenance-free oil bath solution
- › With the ability to make either one or two windrows, the RA2071T EVO can make two smaller windrows in heavy crop conditions or one windrow in light crop conditions
- › Kubota's center delivery rake models feature rear-controlled steering, allowing the rake to make headland turns of up to 80 degrees

Rotary Rakes

| Kubota Model | FarmLine | | | | ProLine | | | |
|-------------------------|----------|---------|---------|-----------------|-----------------|------------------|------------------|------------------|
| | RA1035 | RA1042T | RA1047T | RA2071T EVO | RA2072 | RA2076 | RA2577 | RA2584 |
| Working Width | 11' 6" | 13' 9" | 15'5" | 9' 10" – 22' 3" | 20' 4" - 23' 7" | 23' - 25' 7" | 25' 3" | 24' 11" - 27' 7" |
| Transport Width | 5' 9" | 6' 7" | 7'10" | 9' 10" | 9' 2" | | 9' 9" | |
| Transport Length | 11' | 13' 2" | 15'9" | 26' 11"* | 19' 4" | | | 20' 6" |
| Transport Height | 5' 7" | 7' 7" | 8'8" | 7' 10" – 9' 6" | 12' 8" | 11' 4** / 13' 5" | 12' 4** / 14' 5" | 11' 4** / 13' 5" |
| Weight (lbs.) | 926 | 1257 | 1466 | 2976 | 3430 | 3616 | 5049 | 4299 |
| Swath Width | N/A | N/A | N/A | N/A | 3' 11"- 6' 7" | 4' 3"- 7' 3" | N/A | 4' 3"-7' 3" |

HITCHING SYSTEM

| | | | | | | | | |
|-----------------------------------|-------------|----------|-----|----------|----------|-----|--|--|
| Pivoting 3-Point Headstock | Category II | N/A | | | | | | |
| Lower Links (2-point) | N/A | | | | Standard | | | |
| Linkage Drawbar | N/A | Standard | | | | N/A | | |
| Gauge Wheel 16° | Optional | | N/A | Optional | | N/A | | |

ROTORS/TINE ARMS/TINES

| | | | | | | | | |
|-----------------------------------|------------|-----|-------|----------------|-------------|------------|-------|--------|
| Rotor Diameter | 9' 2" | 11' | 12' | 9' 8" | 11' | | 12' | |
| Swath Delivery | Left | | Slide | Left or Center | Center | | Left | Center |
| Number of Rotors | 1 | | | 2 | | | | |
| Number of Arms/Rotor | 10 | 11 | 12 | 11/12 | 11 | | 12/13 | 2 x 12 |
| Number of Double Tines/Arm | 4 | | | | | | 4/5 | 4 |
| Tine Diameter | 0.35" | | | | | | 0.39" | |
| Detachable Tine Arms | Standard | | | | N/A | Standard | | |
| Height Adjustment | Mechanical | | | | Hydr./Mech. | Mechanical | | |

WHEELS AND AXLES

| | | | | | | | | |
|--------------------------------------|-------------|---------------|--|-----------------|--------------|--|-----------|----------|
| Tires (rotors) | 16 x 6.50-8 | 18.5 x 8.50-8 | | | 16 x 6.50-8 | | | |
| Fixed Tandem Axle | Optional | Standard | | (rear) Optional | Optional | | N/A | Optional |
| Pivoting Tandem Axle | N/A | | | | | | | |
| Stand. Tires (carrying frame) | N/A | | | | 10.0/75-15.3 | | 380/55-17 | |

OPTIONAL EQUIPMENT**

| | | | | | | | | |
|-----------------------|----------|--|--|--|----------|--|--|--|
| Warning Panels | Optional | | | | Standard | | | |
| Road Lights | Optional | | | | Standard | | | |

* With detached tine arms and lowered headstock

** See dealer for additional optional equipment



Wheel Rakes

RA108CR | RA110CR | RA210CR | RA212CR

The Kubota RA Series wheel rakes are fast and productive for handling dry hay in small to mid size operations

- › Transport is easy on the road or through narrow gates and openings. Ranging in transport widths from 9'2" to 9'6"
- › The 200 series features easy multi-point adjustments, for precise windrow formation, utilizing pins and the unit's implement jack
- › Adjustable for 12 different tractor adjustable drawbar heights to ensure proper working angles of the rake wheels
- › Independent wing cylinder lockouts allow for single sided, left or right only raking and provide secure transport mode when both sides are engaged
- › Individual rake wheel suspension is ideal for rough and uneven hay fields allowing each wheel to act independently and follow ground contour



Wheel Rakes

| | RA108CR | RA110CR | RA210CR | RA212CR |
|----------------------------|--|---------|---|---------|
| Transport Length | 21' 2" | | 24' 10" | |
| Working Length (Max) | 21' 6" | | 25' 4" | |
| Transport Width | 9' 4" | 9' 6" | 9' 2" | 9' 3" |
| Transport Height, Min. | 8' | | 8' 4" | |
| Transport Height, Max. | 8' 5" | 8' 9" | 9' 7" | 9' 11" |
| Min. Working Width | 15' 8" | 18' 4" | 18" | 21" |
| Max. Working Width | 16' 8" | 20' 4" | 21' | 25' |
| Min. Window | 34" | | 36" | |
| Max. Window | 72" | | 89" | |
| Working Height | 55" | | | |
| Typical Weight w/o Options | 1460 | 1640 | 1790 | 1970 |
| Wing Spread | N/A | | One hole changes window and working width 6" – 7" | |
| Hydraulic Circuits | Closed-center or Open-center, one remote | | | |
| Hydraulic Power Required | 1880 psi 10 gpm | | | |
| Minimum Tractor HP | 30 | 40 | 40 | 50 |
| Counterbalance Valve | Optional | | Standard | |

* See dealer for optional equipment



Balers

BV4160 ECONO | BV4160 | BV4180 | BV4580 | BV5160 | BV5160N | | BV5160RN
BV5200 | BV5200RN | BV5200NET

Leverage decades of experience in the round baler industry*

- › All Kubota Balers, except 4160ECONO, come equipped with Intelligent Density 3-D that gives you the ability to adjust the bale density in 3 areas to match any crop or crop condition
- › All balers except 4160ECONO come silage ready
- › Kubota's BV5160 SC14, BV5160RN, BV5200RN, and BV5200 SC14 hydraulic drop floor enables the operator to clear blockages easily from the tractor cab
- › The Kubota BV5160/BV5160N and BV5200RN are equipped with the SuperCut-14 knife roller — an ideal solution for silage applications — featuring a chopping length of 2.75" that produces dense finely chopped bales that reduce mixing time and are more digestible for nutrient absorption for livestock
- › Kubota's BV4160 and BV4180 models are fitted with an efficient fork feeder intake system, which provides direct feed into the bale chamber, allowing for fast and efficient baling
- › Kubota's balers that are equipped with the front mounted PowerBind net wrap technology are time efficient and feature simple loading, routing, and net that is applied tight on the bale time after time
- › The BV4580 round baler features a low-profile 86" wide pickup designed to deliver high crop volumes into the full-width rotary feeding system, producing high quality 5' x 6' bales
- › The Kubota BV5160RN and BV5200RN is equipped with a rotor intake - ideal for silage applications where chopping is not needed or working in high volume crops for silage or dry hay.

*Kverneland Group was founded in 1879 and acquired by Kubota in 2012

Balers

| | BV4160 ECONO | BV4160 | BV4180 | BV5160RN | BV5160 SC14 | BV5200 SC14 | BV5200RN | BV4580 |
|--|---------------------|--------------------------|--------------------------|----------------------|----------------|----------------|-------------------------|---------------------|
| Length | 176" | | | | | | 187" | |
| Width | | | | 99" | | | 116" | |
| Height | 106" | | 112" | 108" | | 111" | | 112" |
| Weight (lbs.) | 4842 | | 5842 | 6614 | 7055 | 7849 | 7275 | 7275 |
| BALE CHAMBER | | | | | | | | |
| Diameter Min. | 31" | | | 24" | | | 31" | |
| Diameter Max. | 65" | | 71" | 65" | | 78.5" | | 60" |
| Bale Width | 47" | | | | | | 62" | |
| Bale Formation | 5 belts + 3 rollers | | | | | | | 8 belts + 3 rollers |
| Endless Belts | N/A | | | Standard | | | N/A | |
| PICK-UP | | | | | | | | |
| Working Width | 67" | | 79" | 86" | | | | |
| Number of Tine Rows | 4 | | | 5 | | | | |
| Tine Spacing | 2.36" | | | | | | | |
| Wind Guard | Crop Deflector | | | Roller Wind Guard | | | | |
| Pneumatic Gauge Wheel | (2) Standard | | | | | | | |
| INTAKE SYSTEM | | | | | | | | |
| Open Throat | Standard | | | N/A | | | Standard | |
| Intake System | Feeder Fork | | | Rotor | | | Easy Feed | |
| SuperCut-14 Knives | N/A | | | Standard | | | N/A | |
| Knife Group Selection | N/A | | | Standard | | | N/A | |
| Unblocking System | N/A | | | Hydraulic Drop Floor | | | N/A | |
| DRIVELINE | | | | | | | | |
| 1¼" Chains | Standard | | | | | | | |
| W-A PTO Shaft | Standard | | | | | | | |
| Shear Bolt Protection | Standard | | | N/A | | | Standard | |
| Cam Clutch Protection | Standard | | | | | | | |
| BINDING | | | | | | | | |
| Twine Only | Standard | N/A | | | | | | |
| Net Only | N/A | Optional | | BV5160RN | Optional | | BV5200RN | Optional |
| Twine and Net | N/A | Optional | | N/A | Optional | | N/A | Optional |
| OPERATIONS | | | | | | | | |
| ISOBUS | N/A | Optional | | Standard | | | Optional | |
| Operating Terminal | | Focus 3 | | Tellus GO | | | Focus 3 | |
| IsoMatch Tellus | N/A | Optional | | | | | | |
| Hydraulic Outlets | Standard | | | | | | | |
| PTO (rpm) | | | | 540 | | | 540/1,000 | |
| Min. Power Requirement (PTO hp) | 55 | | 60 | 75 | | | 70 | |
| WHEELS AND AXLES | | | | | | | | |
| Standard Wheel Size | 11.5 x 15 Std. | PREM 31 x 13.5 x 15 Std. | PREM 31 x 13.5 x 15 Std. | 31 x 13.5 x 15 Std. | | | | 14L-16.1SL |
| Optional Wheel Sizes | Optional | | | 19L-16.1SL | | | 16.5-16.1SL, 19L-16.1SL | |



Wrappers

WR1100C | WR1400CM | WR1600C

With remote-controlled, three-point mounted and trailed turntable wrappers, the perfectly wrapped bale is right at hand.

- › The entire wrapping process of the Kubota WR1100 can be controlled via standard handheld remote from the loading tractor
- › The Kubota WR1100 is ideal for “wrap and stack” operations, as it can be mounted on the rear or front hydraulics of the tractor, or used as a static machine with an external power pack unit
- › For smaller tractors, the extendable wheel arm of the Kubota WR1400 and WR1600 allows bales up to 2200 and 2650 lbs. respectively
- › Turntable with two driven rollers is designed for high bale stability and smooth, even rotation
- › The low design of the Kubota WR1400 and WR1600 ensures fast and gentle unloading of the bale with no need for an extra fall damper
- › The Kubota WR1600C is a high capacity wrapper, capable of wrapping one bale while carrying another one and it features 2 film applicators that reduces your wrapping time

Wrappers

| | WR1100C | WR1400C | WR1400M | WR1600C |
|------------------|----------------|----------------|----------------|----------------|
| Transport Length | 8' 10" | 14' 12" | 14' 2" | 14' |
| Transport Width | 5' 4" | | 8' 4" | 8' 10" |
| Transport Height | 69" | | 76" | 81" |
| Weight (lbs.) | 1653 | | 2095 | 4233 |

BALE

| | | | | |
|-------------------------|--|------|-------|------|
| Max. Bale Size (L x D) | | | 4 x 5 | |
| Max. Bale Weight (lbs.) | | 2646 | | 3307 |

WRAPPING TABLE

| | | | | |
|---------------------------|----------|--|----------|--|
| Mounted Wrapper | Standard | | N/A | |
| Pull-Type Wrapper | N/A | | Standard | |
| Support Rollers/Belts | | | 2/4 | |
| Automatic Film Cutter | | | Standard | |
| Max. Wrapping Speed (rpm) | | | 30 | |

PRE-STRETCHER

| | | | | |
|--------------------------------------|--|----------|--|----------|
| Pre-stretcher 29.5" (750 mm) | | Standard | | N/A |
| Double Pre-stretchers 29.5" (750 mm) | | N/A | | Standard |

OPERATIONS

| | | | | |
|---------------------------|----------|----------|---------------|-----------------------|
| Manual Cable Control (M) | | N/A | Standard | N/A |
| Programmable Computer (C) | | Standard | N/A | Standard/ Joystick |
| Remote Control (C) | Standard | | N/A | |
| Oil Consumption (gal/min) | | | 7.4 (gal/min) | |

WHEELS AND AXLES

| | | | | |
|------------|-----|--|----------|----------|
| 10.0/80-12 | N/A | | Standard | N/A |
| 15.0/55-17 | | | N/A | Standard |

OPTIONS

| | | | | |
|---------------------------|-----|--|----------|--|
| Bale and Wrap Counter | | | Standard | |
| Auto-stop at End of Cycle | | | Standard | |
| Film End/Tear Sensor | | | Optional | |
| Road Lights | N/A | | Optional | |
| Spare Film Holder | | | Optional | |



VS Series

VS220 | VS330 | VS400VITI | VS500VITI
VS400 | VS500 | VS600 | VS800 | VS1000

The VS Series offers a unique pendulum spreader range for maximum accuracy, spreading quality, and ease of operation.

- > Pendulum movement of the spout ensures the application rate is always identical on both sides for excellent overlap
- > Available with manual control, hydraulic remote control from the cabin, or electronic control from the cab enables variable speed continuous adjustment
- > Minimum wind influence on the spreading pattern helps ensure the tractor does not get covered with fertilizer
- > Setting the application rate with the easy to read scale allows accurate adjustments in kilograms or pounds per acre, minimizing the risk of spreading errors
- > Low filling height makes refilling fertilizer easy, as the hopper can be moved under a tipping trailer or silo, or filled by hand
- > Agitator ensures an even material feed to the spreading unit, so there is less risk of crushing the fertilizer
- > Many different spouts and stainless liners available for spreading a variety of products

VS Series

| | VS220* | VS330* | VS400VITI* | VS500VITI* | VS400* |
|---------------------------|--------|--------|-------------|------------|--------|
| Basic Unit | N/A | 220 | N/A | 400VITI | N/A |
| Hopper Capacity (lbs.) | 485 | 730 | 880 | 1100 | 880 |
| Hopper Capacity (cu. ft.) | 7.8 | 11.7 | 14.1 | 17.7 | 14.1 |
| Hopper Width | 42" | | 45" | | 57" |
| Filling Height | 30" | 39" | 35" | 40" | 35" |
| Weight (lbs.) | 183 | 187 | 276 | 278 | 276 |
| Required PTO HP | 10 | 15 | 20 | 25 | 20 |
| Hitch Category | Cat. I | | Cat. I & II | | |

| | VS500* | VS600* | VS800* | VS1000* |
|---------------------------|-------------|--------|---------|---------|
| Basic Unit | 400 | N/A | 600 | |
| Hopper Capacity (lbs.) | 1100 | 1300 | 1750 | 2200 |
| Hopper Capacity (cu. ft.) | 17.7 | 21.2 | 28.3 | 35.3 |
| Hopper Width | 57" | 69" | | |
| Filling Height | 40" | 38" | 42" | 46" |
| Weight (lbs.) | 278 | 327 | 342 | 364 |
| Required PTO HP | 25 | 35 | 40 | 45 |
| Hitch Category | Cat. I & II | | Cat. II | |

* Spreads both powder and granules



TRACTOR LOADER BACKHOES



Loaders / Landscapers

B26 | L47 | M62

Our unique lineup of Tractor Loader Backhoes is engineered to save you time and effort on every job.

- › The HST Plus transmission* provides the user with auto throttle advance, hydro dual speed, HST response control, and stall guard plus
- › The throttle-up switch* mounted on the loader joystick allows the operator to increase the hydraulic flow to the front end loader, without increasing vehicle speed
- › Backhoes are quick-attach, enabling the optional attachment of Cat. I or Cat. II** 3 point hitch
- › Powered by reliable Kubota diesel engines
- › Backhoe crawling mode* allows the operator to creep forward or backward without repositioning the seat
- › Quick engagement of PTO through electric switch for simple engage and disengagement while operating. Conveniently located, “push and turn” starts and one push stops the PTO
- › Kubota’s hydraulic 2-lever quick coupler* lets you quickly and easily attach and detach front implements

* Only available on L47/M62 Models

**M62 models only

Loaders/Landscapers

| | B26 | L47 | M62 |
|--|---------------------------------------|---------------------|--------|
| Engine Type (Kubota, liquid-cooled, diesel) | E-TVCS, 3-cylinder, Tier 4 Final | EPA Tier 4 Final | |
| Horsepower (gross)* | 23.3 | 47.1 | 63 |
| Displacement (cu. in.) | 68.5 | 148.5 | |
| Overall Length (w/ backhoe) | 198.0" | 233.9" | 252.9" |
| Overall Width (w/ loader) | 60" | 72.5" | 84.8" |
| Wheelbase | 62.2" | 72.5" | 80.7" |
| Transmission | Hydrostatic (HST) infinite 3-range | HST Plus 6-range | |
| Tractor Weight (lbs.) (w/ loader, backhoe, and ROPS/FOPS) | 4,001 | 7,205 | 8,925 |

COMPATIBLE IMPLEMENTS

| | | | |
|--------------|-------|---------|--------|
| Backhoe | BT820 | BT1000B | BT1400 |
| Front Loader | TL500 | TL1300 | TL1800 |

BACKHOE SPECIFICATIONS

| | BT820 | BT1000B | BT1400 |
|----------------|---------------|---------|--------|
| Digging Depth | 99.8" | 121" | 169.8" |
| Loading Height | 77.3" | 92.9" | 130.9" |
| Bucket Sizes | 12", 18", 24" | 12–36" | 12–36" |

FRONT LOADER SPECIFICATIONS

| | TL500 | TL1300 | TL1800 |
|--|------------------------|-----------------------------------|--------|
| Maximum Lift Height | 94.5" | 113.9" | 126.1" |
| Lift Capacity (lbs.) at Full Height/Pivot Point | 1,301 | 2,848 | 3,960 |
| Material Bucket | 60" | 72" | 84" |
| Loader Feature | Mechanical spill guard | Automatic hydraulic self-leveling | |

* SAE J1995





SCL1000

Compact in size, packed with performance, Kubota's Stand-on Compact Loader conquers the toughest of tasks yet is nimble enough to get in tight spaces.

- › 23.7 HP turbo charged Kubota engine provides quiet operation, high altitude performance and requires no DPF
- › Vertical lift loader arms reach higher and further than the competition with a hinge pin height of 84.7" and a reach of 26" (at 45° dump angle).
- › 1000 lbs. ROC combined with 15 gpm auxiliary hydraulic flow make for a powerful and productive compact utility loader
- › 4.3" Color LCD monitor includes Keyless start with passcode protection and easy to read consolidated machine monitoring with service reminders. A convenient 12 volt charging port is also standard
- › The patented T-drive handle provides intuitive and ergonomic steering. Hydraulic pilot-operated loader and drive control valves offer precise and responsive control of the machine
- › Right hand joystick controls loader arm and bucket movement. Auxiliary hydraulics are easily operated without removing your hand from the loader joystick. Continuous flow in either direction is as simple as pushing a button
- › Easy to access centralized filters and everyday maintenance items. Dash indicator light alerts when the air filter needs cleaned, and service information is readily available at the touch of a button
- › Heavy-duty cast CII coupler and protective cover for bucket cylinder fittings. CII coupler is standard. Optional welded 2-lever style coupler
- › Works in zero clearance yards with low impact wide track design (4.0 psi) minimizing damage to grass or landscaping with 4.9 mph travel speed
- › Auxiliary hydraulic lines are routed inside the loader arm for optimal protection. Case drain is standard. Auxiliary hydraulic couplers are pressurized

| ENGINE | |
|--|---|
| Engine Type | Water cooled 4 cycle diesel engine with 3 cylinder, turbo, EPA Tier 4 |
| Model Name | KUBOTA D902-T |
| Total Displacement) | 54.8 cu.in. (898 cm ³) |
| Engine Power - SAE J1995 Gross | 23.7 HP (18.5 kW/rpm) |
| Rated Speed | 2,800 rpm |
| Low Idling Speed | 1,250 rpm |
| DIMENSIONS | |
| Overall Length - Transport (w/Std Bucket Parallel to Ground) | 107.7" (2.74 m) |
| Overall Length (w/o Bucket) | 84.9" (2.16 m) |
| Overall Height | 55.7" (1.41 m) |
| Overall Width w/Std Bucket | 36" (91.44 cm) |
| Operating Weight (w/o Operator) lbs | 3,035 (1,376 kg) |
| Rated Operating Capacity (35%) | 1,000 lb (453 kg) ROC |
| Tipping Load | 2,857 lbs (1,296 kg) |
| Wheelbase | 40.5" (1.03 m) |
| Hinge Pin Height at Max. Lift | 84.7" (2.15 m) |
| Reach at Max. Lift and 45° Dump | 26" (66 cm) |
| Track Width | 9.8" (24.9 cm) |
| Ground Clearance | 7.4" (18.8 cm) |
| Angle of Departure | 25.2° |
| PERFORMANCE | |
| Attachment Mounting System | CII (Common Industry Interface) or 2 Lever Quick-Attach |
| Travel Speed (Fwd/Rev) | 4.9 mph (7.9 km/h) |
| Ground Pressure (with Operator) | 4.0 psi, 28.0 kPa (0.28 kgf/cm ²) |
| Battery Capacity | 12V, RC 80, 540 CCA |
| Auxiliary Hydraulic Flow | 15 gal/min (56.7812 L/min) |
| Auxiliary Hydraulic Pressure | 2,800 psi (19.3 mPa) (196.8 kgf/cm ²) |
| SERVICE & FILL CAPACITIES | |
| Fuel Tank Capacity | 7.75 gal (29.3 L) |
| Hydraulic System | 6 gal (22.7 L) |





SSV Compact Skid Steer Loaders

SSV65 | SSV75

Greater power now comes in a smaller package. Our SSV skid steer loader is easier to transport from site to site and easier to maneuver in tight spaces.

- › Increase operator comfort on our spacious cabs
- › The sliding front entry door can be opened or closed regardless of loader position
- › Cabin has an optimized air conditioning and climate control system for all-year-round operator comfort
- › Move more material faster in applications such as agriculture, construction, and landscaping
- › An optional multi-function lever allows fingertip control of all major vehicle and implement operations
- › The closed cab is radio-ready with speakers, wiring, and antenna standard equipment
- › Flip a switch on the hydraulic quick coupler to hook up or remove attachments without leaving your seat
- › Discover the increased lifting capacity, higher lift heights, and overall higher productivity of the SSV Series

Skid Steer Loaders

| | SSV65 | SSV75 |
|--|-----------------------|---------------|
| Operator Station | Open cab / Closed cab | |
| Operating Weight (lbs.) (inc. operator weight 175 lbs.) | 6,790 / 7,055 | 8,157 / 8,422 |
| ENGINE | | |
| Model | V2607-CR-TE4 | V3307-CR-TE4 |
| Emission Certification | Tier 4 | |
| Gross HP (hp/rpm)* | 64/2,700 | 71.6/2,600 |
| Displacement (cu. in.) | 159.7 | 203.3 |
| Cylinders | 4 | |
| Bore Stroke | 3.5 x 4.4" | 3.8 x 4.8" |
| Aspiration | Turbocharged | |
| LOADER PERFORMANCE | | |
| Rated Operating Capacity 50% Tipping Load (lbs.) | 1,950 | 2,690 |
| Tipping Load (lbs.) | 3,900 | 5,380 |
| Breakout Force – Bucket (lbf.) | 4,839 | 5,884 |
| Breakout Force – Lift Arm (lbf.) | 3,858 | 4,850 |
| Lift Arm Path | Vertical | |
| UNDERCARRIAGE | | |
| Standard Tire Size | 10-16.5-8PR | 12-16.5-10PR |
| Chain Size ASA# | 80 | 100 |
| Travel Speed – Low (mph) | 6.9 | 7.4 |
| Travel Speed – High (mph) | 11.1 | 11.8 |
| Traction Force (lbf) | 7,339 | 8,494 |
| Ground Clearance | 7.6" | 8.1" |
| HYDRAULIC SYSTEM | | |
| Loader Hydraulic Pressure (psi) | 3271 | |
| Aux. Hydraulic Flow (standard/high) (gpm) | 18.0 / 28.0 | 20.9 / 30.4 |
| Hydraulic Tank (gal.) | 4.2 | |
| Fuel Tank (gal.) | 25.4 | 26.9 |

* SAE J1995



CONSTRUCTION EQUIPMENT



SVL Compact Track Loaders

NEW Model SVL50x | SVL65-2 |
SVL75-3 | NEW Model SVL97-3

The SVL Series provides powerful breakout force and lifting capacity for groundbreaking new levels of performance and productivity.

- › Powered by 4-cylinder Kubota turbocharged engines with 49.6, 68.3, 71.6 and 96.4 horsepower, these engines are equipped with common rail fuel injection and diesel particulate filters.
- › Standard-equipped 2-speed travel and high ground clearance helps ensure excellent travel performance on difficult terrains
- › Comfortable and spacious cab area features a luxurious, adjustable full-suspension seat and plenty of legroom
- › Angled track frame cover helps to prevent soil from accumulating during operation
- › Easy maintenance features include a large engine compartment door and well laid out engine compartments providing easy access to battery, filters, and fluid fill locations, simplifying daily routine checks
- › Choose an optional high flow system on the SVL65-2 or SVL75-3 and take productivity to a new level. When choosing a SVL97-3 with an optional high flow system, utilize the variable hydraulic flow function to dial in your auxiliary flow for maximum hydraulic attachment performance

SVL50x

- › KubotaNOW™ Telematics (Standard)

SVL75-3 and SVL97-3

- › KubotaNOW™ Telematics (Standard)
- › Rearview camera (Standard)

Compact Track Loaders

| | SVL50x | SVL65-2 | SVL75-3 | SVL97-3 |
|---|---|--------------------------------------|------------------------------------|---------------------------------------|
| Engine Type (Kubota, liquid-cooled, diesel) | D1803-CR-TIE4-CTL-Q turbocharged 4-cylinder | V2607-CR-TE4 turbocharged 4-cylinder | V3307-TE5A turbocharged 4-Cylinder | V3800 CRS-TE4 turbocharged 4-cylinder |
| Horsepower (gross)* | 49.6 hp | 68.3 | 71.6 | 96.4 |
| Displacement (cu. in.) | 111.4 | 159.6 | 203.3 | 230 |
| Overall Length (w/bucket on the ground) | 117" | 136.4" | 142.1" | 153.6" |
| Overall Height (top of cab) | 76.5" | 79.9" | 81.8" | 83.1" |
| Overall Width (w/bucket) | 48" | 68" / 74" | 68" | 81" |
| Operating Weight (lbs.) (ROPS/cab) | 5,450 / 5,620 | 8,135 (3,690) / 8,631 | 9,190 / 9,420 | 11,676 / 11,929 |
| Operator Station | | Open cab / Closed cab | | |

LOADER PERFORMANCE

| | | | | |
|---|--------|-------|----------|-------|
| Rated Operating Capacity (ROC) 35% Tipping Load (lbs.) | 1,176 | 2,100 | 2,490 | 3,459 |
| Tipping Load (lbs.) | 3,361 | 6,000 | 7,112 | 9,700 |
| Breakout Force – Bucket (lbf.) | 4,900 | 4,614 | 6,191 | 7,650 |
| Breakout Force – Lift Arm (lbf.) | 3,560 | 4,266 | 4,723 | 5,288 |
| Lift Arm Path | Radial | | Vertical | |

UNDERCARRIAGE

| | | | | |
|--|-----------|-------------|---------------|-----------|
| Track Width (standard/wide) | 11.8" | 12.6" / 15" | 12.6" / 15.8" | 17.7" |
| Ground Pressure (psi) (standard/wide) | 4.9 | 5.0 / 4.4 | 5.8 / 5.9 | 4.7 / 4.8 |
| Track Rollers (per side) | 3 | 4 | 4 | 5 |
| Track Ground Contact Length | 48.8" | 57.9" | 56.5" | 65.6" |
| Travel Speed (mph) (low/high) | 4.9 / 9.9 | 4.9 / 7.1 | 5.6 / 8.6 | 5.5 / 8.4 |
| Traction Force (lbs.) | 4,791 | 8,406 | 9,678 | 13,174 |
| Minimum Ground Clearance | 8.9" | 9.1" | 11.7" | 11.0" |

AUXILIARY HYDRAULIC POWER

| | | | | |
|--|-------|-------------|-------------|-------------|
| Aux. Hydraulic Pressure (psi) | 3,000 | 3,263 | 3,185 | 3,553 |
| Aux. Hydraulic Flow (gpm) (standard/high) | 20 | 17.4 / 27.0 | 19.2 / 29.8 | 23.1 / 41.2 |

* SAE J1995



Excavators K008-5 | KX018-4 | KX030-4 | KX033-4

Kubota's compact excavators combine maneuverability, power, and reliability with economy to help you haul away more pay dirt on every job.

- › The KX030-4's operation is aided by two new features, the auto downshift feature (high to low) and the dozer blade float for back dragging
- › Compact size increases productivity in confined areas
- › Superior stability with long tumbler distance and wide variable track width (KX018-4) enables you to safely perform jobs using a host of Kubota attachments
- › Variable-width track frame can be hydraulically retracted with the switch of a lever to fit through most doorways (K008-5) and gates (KX018-4)
- › The large cab of the KX018 features ample legroom, adjustable seating, and a wide door to bring comfort to tough work
- › Digital display allows easy access and operation (KX018-4)
- › Two-pattern selection system lets operator choose ISO or SAE operating pattern
- › Easy access makes engine maintenance simple
- › With the stability and lifting capacity of a much bigger machine, the 3-ton KX033-4 offers a level of performance to handle a wide variety of tough excavating jobs
- › With a larger entrance, more legroom, and enhanced ergonomics that simplify routine operations, the KX033-4's luxurious cabin redefines operator comfort

Standard Tail Swing Excavators

| | K008-5 | KX018-4 | KX030-4 | KX033-4 ¹ |
|--|-----------------------------|------------------------------|--------------------------|------------------------------|
| Engine Type (Kubota) | 3-cylinder, Tier 4 Final | | 4 Cylinder, Tier 4 Final | 3-cylinder, Tier 4 Final |
| Engine Model | D722-E4-BH-4US | | V1505-E4-BH-3USA | D1703M-DI-E4 |
| Horsepower (gross)² | 10.3 | 16.1 | 23.3 | 23.3 |
| Displacement (cu. in.) | 44 | 54.8 | 91.5 | 100.5 |
| Overall Length (transport) | 9' 0" | 12' 2.1" | 15' 1.1" | 15' 6" |
| Overall Height | 7' 4" | 7' 7" | 8' 0" | 8' 1" |
| Overall Width | 2' 10" / 2' 4" ³ | 4' 3.2" / 3' 3" ³ | 4' 11" | 5' 1" |
| Operating Weight (lbs.)⁴ | 2,315 | 3,747 | 6,272 | 7,420 |
| Rear Swing Clearance | 12.6" | 16.5" | 20.9" | 18.7" |
| Maximum Digging Depth | 5' 8" | 7' 9.7" | 9' 7" | 10' 6" / 12' 2" ¹ |
| Maximum Dumping Height | 6' 8" | 7' 9.7" | 10' 4" | 11' 7" |
| Pump Capacity (gpm) | 5.6 | 12.0 | 8.3 | 26.5 |
| Auxiliary Hydraulic Line Flow Rate (gpm) | 5.5 | 7.4 | 13.1 | 15.8 |
| Bucket Breakout Force (lbf.) | 2,205 | 3,594 | 6,924 | 8,138 |
| Maximum Traveling Speed (mph) | 1.2 / 2.5 | 1.4 / 2.6 | 1.7 / 2.7 | 1.9 / 2.9 |
| Ground Contact Pressure (psi)⁴ | 3.41 | 3.7 | 3.9 | 4.365 |

OPTIONAL ATTACHMENTS

| | | | | |
|------------------------------------|--------|------------|----------|----------------------------------|
| Hydraulic Breaker (ft./lb.) | 200 | 300 | 350 | 500 |
| Hydraulic Thumb | N/A | | Optional | |
| Pin-On Bucket | 8"–16" | 9"–18" | 12"–24" | |
| Quick Attach Buckets | N/A | 9"–18" | 12"–36" | |
| Quick Coupler | N/A | Mechanical | | Mechanical/ Hydraulic Coupler |

1 – KX033-4 available with an extendable dipper arm; 2 – SAE J1995; 3 – Variable width tracks; 4 – Canopy, rubber





Excavators KX040-5 | KX057-5 | KX080-5

Get down to bedrock with these powerhouse excavators. The KX series has outstanding utility and exceptional operation.

- › Remarkable breakout force of 14,660 lbs. helps ensure high productivity in the toughest applications (KX080-5)
- › Advanced Load-Sensing Hydraulic System provides optimum oil flow to each cylinder, making operation under most loads easier and smoother
- › Hydraulic 6-in-1 blade for KX040-5 angles 25 degrees and tilts 10 degrees to make leveling and backfilling work incredibly easy
- › Oil-flow settings are adjusted and stored via the digital panel for quick retrieval from job to job
- › Superior cabin design features air conditioner, two-pattern selection system, 2-speed travel switch, deluxe suspension seat, and retractable seat belt
- › Triple opening covers, ground-level access, and angle track frame give you easy, hassle-free maintenance

KX080-5 Excavators

- › The KX080-5 showcases a 7" LCD color display with an excellent working picture and clear visibility
- › Keyless start and rearview camera are standard kits for the KX080-5
- › Operator comfort is greatly improved on the KX080-5 with the dual adjustable seat and console as well as a much quieter cab standard

Standard Tail Swing Excavators

| | KX040-5 | KX057-5 | KX080-5 |
|---|---|---------------------|--------------------------|
| Engine Type (Kubota) | Three cylinder, liquid-cooled, overhead valve, direct injected, E-CDIS diesel | | 4-cylinder, Tier 4 Final |
| Engine Model | D1803-CR-TE5-BEH5 / D1803-CR-TE5-BEH6, Meets Tier 4 emission standards (Canopy/Cab) | | V2607-CR-E5-BH1 |
| Horsepower¹ | 40.3 | 47.6 | 66.6 |
| Displacement (cu. in.) | 111.4 | 159.6 | 203.3 |
| Overall Length (transport) | 16' 8" | 18' 1.3" | 21' 1.9" |
| Overall Height | 8' 1.8" | 8' 4.4" | 8' 4" |
| Overall Width | 5' 6.9" | 6' 5.2" | 7' 2.6" |
| Operating Weight (lbs.) | 9,964 ² | 12,346 ² | 18,596 ³ |
| Rear Swing Clearance | 17.7" | 11.4" | 14.2" |
| Maximum Digging Depth | 11' 2.7" | 12' 8.2" | 15' 1.1" |
| Maximum Dumping Height | 12' 9.5" | 13' 8.6" | 17' 2.7" |
| Pump Capacity (gpm) | 29.1 | 39.4 | 44.6 |
| Auxiliary Hydraulic Line Flow Rate (gpm) | 17.2 / 9.8 | 19.8 / 9.8 | 26.4 / 14.7 |
| Bucket Breakout Force (lbf.) | 9,535 | 11,177 | 14,660 |
| Maximum Traveling Speed (mph) | 1.8 / 3.1 | 1.8 / 3.1 | 1.7 / 3.0 |
| Ground Contact Pressure (psi) | 4.53 ² | 4.54 ² | 5.25 ³ |

OPTIONAL ATTACHMENTS AND ACCESSORIES

| | | | |
|------------------------------------|------------|------------|------------|
| Hydraulic Breaker (ft./lb.) | 500 | 750 | 750 / 1200 |
| Hydraulic Thumb | Optional | Optional | |
| Pin-On Bucket | 12"–36" | 12"–48" | 18"–60" |
| Pin Grabber Coupler | N/A | Optional | Optional |
| Quick Attach Buckets | 12"–39" | 12"–48" | 18"–60" |
| Quick Coupler | Mechanical | Mechanical | |
| Hydraulic Augers | 6"–36" | 9"–36" | |
| Canopy Lights | Optional | | |
| Travel Alarm | Optional | | |
| Angle Blade | Optional | | |

1 – SAE J1995, SAE J1349; 2 – Canopy, rubber; 3 – Cab, rubber



CONSTRUCTION EQUIPMENT



Excavators

U10-5 | U17-5 | U27-4 | U35-4 | U48-5 | U55-5

The U Series excavators offer performance, durability, convenience, and comfort to help you tackle tougher jobs in even tighter spaces.

- > Two-pattern selection system lets operator choose ISO or SAE operating pattern
- > Zero and tight tail swing offer excellent balance, stability, and better visibility in confined areas
- > Hydraulic variable-width track frame retracts to fit through gates, expands for stable operation (U17-5)
- > Tried and true Kubota diesel engine
- > Unique hydraulic system and large-capacity variable displacement pumps deliver exceptional boom, arm, and bucket movements in the industry
- > The U27-4 has a dig depth of 9' 5" and provides one of the largest operator stations in the industry with a tight tail swing design
- > Optional cabs offer spacious operator area with air conditioning, interior light, and windshield wiper/washer for comfortable all-weather operation (U35-4, U48-5, and U55-5)
- > Digital display enhances productivity and makes operation easier

U48-5 and U55-5:

- > 7" LCD color display with an excellent working picture and clear visibility
- > Keyless start and rearview camera are optional kits for the U48-5 & U55-5

U-10:

- > The U10-5 has side lever joysticks, for easier and more productive excavator operation

Zero and Tight Tail Swing Excavators

| | U10-5 | U17-5 | U27-4 | U35-4 | U48-5 | U55-5 |
|--|--------------------------|---|--------------------------|--------------|----------------------------|--------------------------|
| Engine Type (Kubota) | 3-cylinder, Tier 4 Final | 3-cylinder, liquid-cooled, overhead valve, indirect injected, E-TVCS diesel | 3-cylinder, Tier 4 Final | | Kubota V2607 | 4-cylinder, Tier 4 Final |
| Engine Model | D722-E4-BH-5US | D902-E4-BH-6EU | D1105-BH | D1703M-DI-E4 | Turbo Charged D1803-CR-TE5 | V2607-CR-E5-BH1 |
| Horsepower¹ | 10.3 | 16.1 | 20.8 | 23.3 | 38.8 | 47.6 |
| Displacement (cu. in.) | 44" | 54.7 | 68.5 | 100.5 | 159.6 | 159.6 |
| Overall Length (transport) | 9' 9" | 11' 7.8" | 13' 6" | 15' 7" | 211.4 | 18' 0.5" |
| Overall Height | 7' 5" | 7' 9.3" | 7' 11" | 8' 1.2" | 100.4 | 8' 4.4" |
| Overall Width | 3'3" / 2'6" | 3' 3" / 4' 3.2" | 4' 11" | 5' 6.9" | 77.2 | 6' 5.2" |
| Operating Weight (lbs.)³ | 2,646 | 1,770 | 5,625 | 8,129 | 10,593 | 12,247 |
| Rear Swing Clearance | 0.6" | 0" | 1.6" | 2" | 1.2" | 2.5" |
| Maximum Digging Depth | 5' 11" | 7' 6.2" | 9' 5" | 9' 8.9" | 133.1 | 11' 10.3" |
| Maximum Dumping Height | 7' 3" | 8' 1.2" | 10' | 11' 0.7" | 149.2 | 13' 2.3" |
| Pump Capacity (gpm) | 2.8 x 2 | 4.6 | 20.3 | 26.5 | 31.4 | 39.4 |
| Auxiliary Hydraulic Line Flow Rate (gpm) | 5.5 | 7.3 | 12.7 | 15.8 | 18.5 | 19.8 / 9.8 |
| Bucket Breakout Force (lbf.) | 2,337 | 3,417 | 7,014 | 7,924 | 7,419 | 11,177 |
| Maximum Traveling Speed (mph) | 1.2 / 2.5 | 1.4 / 2.7 | 1.6 / 2.7 | 1.9 / 2.9 | 1.7/3.1 | 1.8 / 3.1 |
| Ground Contact Pressure (psi)² | 4.3 | 4.0 | 3.321 | 4.89 | --- | 4.42 |

OPTIONAL ATTACHMENTS AND ACCESSORIES

| | | | | | | |
|-----------------------------------|------------|--------|----------|-----|-------|---------|
| Canopy Lights | Optional | | | | | |
| Hydraulic Hammer (ft./lb.) | 200 | 300 | 350 | 500 | 500 | 750 |
| Hydraulic Thumb | Optional | | | | | |
| Pin-On Buckets | 9"-16" | 9"-18" | 12"-24" | | N/A | 12"-48" |
| Pin Grabber | Optional | N/A | Optional | | | |
| Quick-Attach Buckets | 9"-16" | | | | | |
| Quick Coupler | Mechanical | | | | | |
| Spark Arrest Muffler | Optional | | | | | DPF |
| Steel Tracks | N/A | 11.8" | | | 15.7" | |
| Hydraulic Augers | 9"-36" | 6"-36" | 9"-36" | | | |
| Travel Alarm | Optional | | | | | |

1 – SAE J1995; 2 – Variable Width Track; 3 – Canopy, rubber



CONSTRUCTION EQUIPMENT



Wheel Loaders R430 | R540 | R640

Our highly versatile R Series wheel loaders are equipped with features to offer high visibility, unrelenting power, and productivity for many worry-free years to come.

- › 4-wheel drive, 100% on-demand differential lock, and rear frame oscillation provide excellent traction and stability
- › The ultra-comfortable, enclosed cab helps ensure year-round comfort with great visibility, a suspension seat, and hanging-type foot pedals
- › Easy access makes engine maintenance simple
- › Equipped with Kubota's own powerful Tier 4 Final diesel engine
- › Joystick mounted FnR switch allows on-the-go directional changes without clutching or braking (Only on the R540 and R640 models)
- › Make fast, safe, and easy attachment changes with the Quick Coupler

R40 Wheel Loader

- › Improved visibility - larger front window; full size right window (door size); delta shaped wheel loader arms
- › Operator comfort - moved console of switches to the right side of the cab increasing foot and leg space; R540 multi function control lever is standard

Wheel Loaders

| | R430 Canopy / Cab | R540 Canopy / Cab | R640 Canopy / Cab |
|--|--|---|--|
| Engine Type (Kubota, liquid-cooled, diesel) | 3-cylinder, Turbocharged, Tier 4 Final | 4-cylinder, Tier 4 Final | 4-cylinder, turbocharged, Tier 4 Final |
| Engine Model | Turbo Charged D1803-CR-TIE4-WL5 | V2607-CR-E5-WL | Turbo Charged V2607-CR-TE5-WL |
| Horsepower (gross)* | 47.6 | 51.0 | 64.3 |
| Operating Weight (lbs.) | 7,758 / 8,232 | 9,888 / 10,285 | 11,177 / 11,563 |
| Bucket Breakout Force (lbf.) | 5,215 | 7,761 | 10,415 |
| Loader Boom Linkage | Hybrid Link | Hybrid | |
| Standard Bucket Capacity (cu. yd.) | 0.5 | 0.85 | 1.0 |
| Tipping Load Straight w/ Bucket (lbs.) | 5,335 / 5,743 | 6,437 / 6,768 | 7,452 / 7,760 |
| Tipping Load Straight w/ Pallet Forks (lbs.) | 3,494 / 3,770 | 4,960 / 5,202 | 5,820 / 6,063 |
| Tipping Load Full Turn w/ Bucket (lbs.) | 4,596 / 4,949 | 5,644 / 5,930 | 6,526 / 6,812 |
| Tipping Load Full w/ Pallet Forks (lbs.) | 3,009 / 3,251 | 4,365 / 4,586 | 5,115 / 5,313 |
| Rated Operating Capacity (SAE 50% w/ Bucket (lbs.)) | 1,504 / 1,625 | 2,822 / 2,965 | 3,263 / 3,406 |
| Rated Operating Capacity w/ Pallet Forks (lbs.) | 2,298 / 2,474 w/bucket | 2,183 / 2,293 | 2,558 / 2,657 |
| Angle of Articulation | 40° | ±40° | |
| Frame Oscillation | ±8° | ±8° | |
| Dump Clearance | 7' 2" | 8' 0" | 7' 9" |
| Hinge Pin Height | 9' 2" | 10' 7" | 10' 8" |
| Reach Fully Raised | 2' 9" | 2' 7" | 2' 9" |
| Turn Radius (loader clearance) | 12' 1" | 13' 8" | 13' 10" |
| Turn Radius (tire clearance) | 10' 1" | 11' 1" | 12' 0" |
| Overall Length w/ Bucket | 14' 4" | 17' 8" | 18' 0" |
| Overall Width w/o Bucket | 5' | 5' 7" | 5' 11" |
| Overall Height | 8' 3" | 8' 1" | 8' 2" |
| Tread | 3' 10" | 4' 5" | 4' 7" |
| Wheelbase | 5' 10" | 6' 5" | 6' 7" |
| Auxiliary Hydraulic Flow (gpm) | 11.2 | 14.2 | 17.8 |
| Brakes – Service | Enclosed wet disc | Enclosed, self-adjusting, wet disc | |
| Brakes – Parking | Spring applied hydraulic released wet disc | Spring applied, hydraulic release, wet disc | |
| Front/Rear Axle Traction Lock | Limited slip differential | Diff-lock (both axles), 100%, on-demand | |
| Transmission Type | HST, 2-speed | | |
| Traction Force (lbs.) | 5,485 | 6,541 | 8,588 |
| Travel Speed (mph) | 0 - 12.4 | | |
| ADDITIONAL ATTACHMENTS AND ACCESSORIES | | | |
| Backhoe | Rear | N/A | |
| Light Material Bucket (cu. yd.) | 0.75 | 1.0 | 1.5 |
| Pallet Fork | 48" | | |
| Scrap Grapple Bucket | 72" | | |

* SAE J1995

UTILITY VEHICLES



RTV520

RTV520

| | GENERAL PURPOSE | DELUXE |
|---|---|------------------------------|
| Engine Type (Kubota) | 2-cylinder, gasoline, water-cooled, EFI | |
| Horsepower (net)* | 17.4 | |
| Transmission | Variable Hydro Transmission (VHT Plus) | |
| Brakes (front/rear) | Dry disc brake | |
| Fuel Capacity (gal.) | 5.1 | |
| Towing Capacity (lbs.) | 1,168 | |
| Cargo Bed Capacity (lbs.) | 935 | |
| Weight (lbs.) | 1,378 | 1,393 |
| Length (in.) | 105.1 | 111.2* including front guard |
| Overall Height (in.) | 74" | |
| Width (in.) | 54.7" | |
| Ground Clearance (front/rear axle in.) | 8.9" / 6.7" | |
| Color | Orange/Camouflage (Realtree® ** Hardwoods®) | Orange |

ADDITIONAL IMPLEMENTS AND ACCESSORIES

| | | |
|------------------------------|----------|----------|
| Alloy Wheels | Optional | Standard |
| Steel Front Guard | Standard | |
| Speedometer | Optional | |
| Cab Systems | Optional | |
| Canopy and Windshield | Optional | |
| 3,500 lb. Winch | Optional | |

* SAE J 1940 Net; ** Realtree® Hardwoods Camouflage is a registered trademark of Jordan Outdoor Enterprises, Ltd.

Mighty Capability. Agile Package.

- > **Powerful Kubota Liquid-Cooled EFI Engine.** A more powerful 2-cylinder engine provides increased horsepower, with quiet and reliable muscle for most jobs. Kubota built, the durable engine is liquid-cooled to ensure consistent performance throughout the day. Electronic Fuel Injection (EFI) makes starting the engine in cold-weather easier, and provides instant power with greater throttle control
- > **Capable Towing Capacity.** The reliable engine delivers capable towing capacity, made simple with a standard trailer hitch for greater versatility and an ability to attach trailers or pull-behind equipment. For those who refuse to compromise, the mighty RTV520 can tackle even the toughest jobs with its 1,168 lbs towing capacity
- > **Comfortable Seat Design.** The stylish matte-black and contoured seats have been redesigned to provide better comfort during long rides
- > **Narrow Stance.** The RTV520's compact dimensions let you nimbly maneuver into and out of tight spaces with ease
- > **Tight Turning Radius.** With a tight turning diameter of just 21.7 ft., the RTV520 can work in narrow sites where bigger utility vehicles can't go
- > **Metal Cargo Bed.** The RTV520 features a durable metal cargo bed
- > **Radiator with Screen.** The new radiator which features a screen to maximize protection of the radiator. A window provides superior accessibility for cleaning and maintenance



UTILITY VEHICLES





SIDEKICK

Shown with optional accessories

The gas-powered, large chassis Sidekick is where Durability Meets Speed

- › The Sidekick is built upon the robust, heavy-duty platform to provide proven durability and performance
- › Electronic Fuel Injection (EFI) and a powerful 54 HP gasoline, water-cooled engine provide plenty of torque, astonishingly quick acceleration, and high transport speed (up to 40 mph)
- › Idle Speed Control (ISC) ensures stable power
- › The Continuously Variable Transmission with centrifugal clutch (CVT-Plus) provides fast acceleration, smooth operation, and controlled braking with engine-assisted deceleration
- › The cogged belt on the CVT-Plus is kept tight for minimal slippage and excellent durability, fully shielded to help keep out dust and water, and cooled with a large fan for even greater longevity
- › Light at low speeds and firm at high speeds, the Sidekick's speed-sensitive 45A Electronic Power Steering (EPS) is standard on all models and offers exceptional steering control, handling and stability
- › EPS helps to ensure outstanding performance even when the cabin/cargo box is heavily loaded or the snow blade is attached—operating at higher speeds, EPS safeguards against over-steering, increasing stability and control
- › Even when fully loaded, the Sidekick won't bottom out—front and rear adjustable independent suspension delivers a smooth ride with plenty of clearance
- › The aggressive style is offered in five distinct colors, including the Special Edition Black Model, which comes with alloy wheels, spray-on bed liner, and visually distinct design and graphics to signify being “ready for anything”

UTILITY VEHICLES



SIDEKICK

All Photos Shown with optional accessories

| | General Purpose | Worksite | Special Edition |
|-------------------------------------|---|---|-----------------|
| Engine Type (Kubota) | 2-cylinder, 4-cycle, Gas, DOHC | | |
| Horsepower (gross)* | 54 | | |
| Transmission | CVT PLUS (CVT with centrifugal clutch) | | |
| Power Steering | Speed sensitive Electric Power Steering | | |
| Brakes (front/rear) | 4-wheel hydraulic disc brake | | |
| Fuel Capacity (gal.) | 8.64 | | |
| Weight (lbs.) | 1,761 | | |
| Overall Height | 79.5" | | |
| Ground Clearance (rear axle) | 9.9" | | |
| Width | 63.2" | | |
| Body Color | Orange | Desert Sand - Black - Orange - Camouflage** | Stone Gray |
| ADDITIONAL ACCESSORY OPTIONS | | | |
| Alloy Wheels | Optional | | Standard |
| Hydraulic Bed Lift | Optional electric hydraulic power lift | | |
| Steel Front Guard | Optional | Standard | |
| Spray-On Bed Liner | N/A | Optional | Standard |

* SAE J1995; ** Realtree® AP Camouflage is a registered trademark of Jordan Outdoor Enterprises, Ltd.

Visit KubotaUSA.com for a full listing of accessories and attachments.





Whether you're hauling half a ton of cargo on the job site or feeding livestock out in the pastures, the smooth-riding, hard-charging RTV-X gets it done.

- › VHT-X (Variable Hydraulic Transmission) - Kubota's VHT-X provides exceptional performance on various terrain with smooth and powerful acceleration. Low-speed driving is made exceptional through smooth throttle control, great traction and maneuverability with or without loads
- › Dynamic Brakes - One of the major benefits of the VHT-X transmission is the dynamic braking, which slows the vehicle down when you remove your foot from the throttle. It also provides drivers a sense of confidence as they travel down slopes. The ability to utilize one pedal operation creates a great experience, for both novice and experienced drivers alike providing a heightened sense of security
- › Towing Capacity - Standard two-inch hitch receivers are located at the front and back. The back receiver lets you tow up to 1,300 lbs.* of gear. (*See owner's manual for detail.)
- › VHT-X (Variable Hydraulic Transmission) - Kubota's VHT-X provides exceptional performance on various terrain with smooth and powerful acceleration. Low-speed driving is made exceptional through smooth throttle control, great traction and maneuverability with or without loads
- › ProKonvert™ Cargo Bed Optional - When you have a job to get done, being able to easily load and unload the cargo bed is critical. The new bed design allows you to open from either side, or the rear - especially useful for easily loading items in the back of the bed

RTV-X

| Grade | Basic | Standard | Premium |
|-----------------------|-------------------------------------|------------------------|---------------------------------|
| Engine Type (Kubota) | 3-cylinders, 4-cycle, diesel, OHV | | |
| Horsepower (gross)** | 23.3 | | |
| Transmission | Variable Hydro Transmission (VHT-X) | | |
| Power Steering | Hydrostatic power steering | | |
| Brakes (front/rear) | Wet disc brake | | |
| Fuel Capacity (gal.) | 7.9 | | |
| Weight (lbs.) | 2,050 | 2,072 | 2,099 |
| Overall Height | 79.5" | | |
| Ground Clearance | 10.4" - 10.5" | | |
| Width | 63.2" | | |
| Cargo Capacity (lbs.) | 1,102 | | |
| Body Color | Orange | Orange / Camouflage*** | Orange, Camouflage, Desert Sand |

ADDITIONAL ACCESSORY OPTIONS

| | | | |
|----------------------|--|---|----------|
| Alloy Wheels | Basic does not offer alloy wheels, only steel wheels. Only the standard and premium lines. | (Orange, Camo) Available (Desert Sand) Standard | |
| Hydraulic Bed Lift | Optional | Standard | Standard |
| Standard Front Guard | Basic | Standard | Premium |
| Spray-On Bed Liner | N/A | (Orange) Available, (Camo) Standard | Standard |

* Manufacturer estimate; ** SAE J1995; *** Realtree® AP Camouflage is a registered trademark of Jordan Outdoor Enterprises, Ltd.

Visit KubotaUSA.com for a full listing of accessories and attachments.





Experience luxurious driving comfort with the factory-installed, climate-controlled cab.

- › RTV-X Cab features a premium grand cab that is built around a unibody chassis frame. The quiet, rattle-free environment and standard, factory installed A/C, heat, and defrost ensure that you'll ride in comfort year round
- › The RTV-X Cab boasts 23.3-horsepower* Kubota diesel engine for demanding jobs that require plenty of power
- › 1,300 lbs. towing capacity with standard front and rear two-inch hitch receivers at the front and back
- › Up to 15.2 cubic feet of cargo — heavy-duty steel cargo box can carry up to a half-ton (1,102 lbs.) of tools, firewood, gear, supplies, and whatever you need to haul from here to there and back again
- › Front PTO attachment options take your RTV-X Cab to a new level of versatility and performance
- › LED Headlights - For the jobs that begin well-before the sun rises and continue on long-after the sun sets, the new LED headlights not only look cool, they illuminate the way so you can stay focused on the job at hand
- › Front and rear independent suspension ensures an exceptional ride, and extra duty IRS (Independent Rear Suspension) sets a new standard for durability
- › ProKonvert™ Cargo Bed Optional - When you have a job to get done, being able to easily load and unload the cargo bed is critical. The new bed design allows you to open from either side, or the rear - especially useful for easily loading items in the back of the bed
- › Flatbed Conversion - For customers loading bulky or awkwardly shaped materials, or having to load the bed with another piece of equipment, customers can easily convert the cargo bed into a flatbed without the use of any tools. A shining example of capability re-imagined
- › VHT-X (Variable Hydraulic Transmission) - Kubota's VHT-X provides exceptional performance on various terrain with smooth and powerful acceleration. Low-speed driving is made exceptional through smooth throttle control, great traction and maneuverability with or without loads

RTV-X Cab

| Trim | Standard | Premium |
|-----------------------|-------------------------------------|----------------------------|
| Engine Type (Kubota) | 3-cylinder, diesel | |
| Horsepower (gross)** | 23.3 | |
| Transmission | Variable Hydro Transmission (VHT-X) | |
| Power Steering | Hydrostatic power | |
| Brakes (front/rear) | Wet disc brake | |
| Fuel Capacity (gal.) | 7.9 | |
| Weight (lbs.) | 2,370 | |
| Overall Height | 82.3" | |
| Ground Clearance | 10.4" | |
| Width | 65.4" | |
| Cargo Capacity (lbs.) | 1,102 | |
| Body Color | Orange | Desert Sand, Camouflage*** |

ADDITIONAL ACCESSORY OPTIONS

| | Steel | Alloy |
|----------------------|----------------------|----------|
| Wheels | | |
| Hand Throttle | Standard | |
| Hydraulic Bed Lift | Standard | |
| Standard Front Guard | Standard and Premium | |
| Spray-On Bed Liner | Optional | Standard |

** SAE J1995; *** Realtree® AP Camouflage is a registered trademark of Jordan Outdoor Enterprises, Ltd.

Visit KubotaUSA.com for a full listing of accessories and attachments.



UTILITY VEHICLES



From spacious cargo capacity to generous seating for up to four adults, this utility workhorse gives you the best possible performance and comfort across a wide range of jobs.

- › K-vertible Cargo Transformation System — two- and four-passenger configuration in less than a minute
- › Powerful Kubota 3-cylinder, liquid-cooled, 4-cycle, 23.3-horsepower* diesel engine
- › Exclusive Kubota 2-range VHT-X (Variable Hydraulic Transmission)
- › Top speed of 25 mph and 1,300 lbs. towing capacity
- › Quick, responsive hydrostatic power steering
- › LED Headlights - For the jobs that begin well-before the sun rises and continue on long-after the sun sets, the new LED headlights not only look cool, they illuminate the way so you can stay focused on the job at hand
- › ROPS that meets both OSHA and SAE requirements for both front and back row seats provides cleaner look and easier cargo loading
- › 20% larger, clog-resistant radiator for simpler maintenance and improved performance
- › Wet disc brakes for smooth, consistent braking and excellent durability
- › Independent front and independent rear suspensions and a long wheelbase deliver a smooth, stable ride
- › Standard 19.1 cu. ft./9.9 cu. ft. (two-seat/four-seat configurations) cargo bed with hydraulic lift capability in either configuration (up to 1,102 lbs. capacity)

RTV-X Crew

| Trim | Basic | Standard | Premium |
|------------------------------|-------------------------------------|-----------------------|---------------------------------------|
| Engine Type (Kubota) | 3-cylinder, 4-cycle, diesel, OHV | | |
| Horsepower (gross)* | 23.3 | | |
| Transmission | Variable Hydro Transmission (VHT-X) | | |
| Power Steering | Hydrostatic power | | |
| Brakes (front/rear) | Wet disc brake | | |
| Fuel Capacity (gal.) | 7.9 | | |
| Weight (lbs.) | 2,370 | | |
| Overall Height | 79.7" | | |
| Ground Clearance (rear axle) | 9.4" | | |
| Width | 63.2" | | |
| Cargo Capacity (lbs.) | 1,102 (long) / 661 (short) | | |
| Body Color | Orange | Orange and Camouflage | Orange, Desert Sand and Camouflage*** |

ADDITIONAL ACCESSORY OPTIONS

| | Steel | Alloy |
|----------------------|----------|----------|
| Wheels | | |
| Hand Throttle | Standard | |
| Hydraulic Bed Lift | Standard | |
| Standard Front Guard | Basic | Premium |
| Spray-On Bed Liner | Optional | Standard |

* SAE J1995; ** Realtree® AP Camouflage is a registered trademark of Jordan Outdoor Enterprises, Ltd.

Visit KubotaUSA.com for a full listing of accessories and attachments.





The RTV-X1130 has the capability, power, and performance to get the job done.

- › Full Steel Frame/CV Joint Guards - The high-rigidity steel frame isolates the occupants from noise, vibrations, and harshness. With structural strength that few in the industry can match, this durable frame can take years of punishment from heavy loads and rough terrain*. (*See owner's manual for details)
- › VHT-X (Variable Hydraulic Transmission) - Kubota's VHT-X provides exceptional performance on various terrain with smooth and powerful acceleration. Low-speed driving is made exceptional through smooth throttle control, great traction and maneuverability with or without loads
- › Wet Disc Brakes - The RTV-X series uses multi-disc wet brakes which provide long brake life. You'll also feel more secure, especially when traveling down long inclines, knowing that dynamic braking is helping to provide additional braking power and greater driving control
- › Standard Prokonvert™ Cargo Bed - It's not enough to get you there and back. You need to get your stuff there and back, as well. This heavy-duty 6ft steel cargo bed can do that for you, carrying more than a half-ton (1212 lbs.) of tools, firewood, gear, supplies...whatever you need to haul from here to there and back again
- › Standard Hydraulic Dump Bed - Dump sand, gravel, turf, or just about anything you can think of, from the RTV-X1130's whopping, 26.1 cu. ft. capacity cargo bed. Cargo that could take significant physical strength and time to unload can now be dumped with little effort in mere seconds

RTV-X1130

RTV-X1130 Worksite

| | | |
|-----------------------|-------------------------------------|----------------------------|
| Body Color | Kubota Orange | RealTree® AP Camouflage*** |
| Engine Type (Kubota) | 3-cylinders, 4-cycle, diesel, OHV | |
| Horsepower (gross)** | 23.3 | |
| Transmission | Variable Hydro Transmission (VHT-X) | |
| Power Steering | Hydrostatic power steering | |
| Brakes (front/rear) | Wet disc brake | |
| Fuel Capacity (gal.) | 7.9 | |
| Weight (lbs.) | 2,340 | |
| Overall Height | 80" | |
| Ground Clearance | 11.3" / 9.4" | |
| Width | 63" | |
| Cargo Capacity (lbs.) | 1,212 | |

ADDITIONAL ACCESSORY OPTIONS

| | | |
|--------------------|----------|---------|
| Wheels | Steel | |
| Hydraulic Bed Lift | Standard | |
| Front Guard | Standard | Premium |
| Spray-On Bed Liner | Standard | |

** SAE J1995; *** Realtree® AP Camouflage is a registered trademark of Jordan Outdoor Enterprises, Ltd.

Visit KubotaUSA.com for a full listing of accessories and attachments.



MOWERS



T Series

T2290KW | T2290KWT

| | T2290KW | T2290KWT |
|---------------------------|---|----------|
| Engine Type | OHV, air-cooled, gasoline, 2-cylinder, V-twin | |
| Engine Model | Kawasaki FR651V | |
| Horsepower (gross) | 21.5** | |
| Transmission | Hydrostatic | |
| Fuel Capacity (gal.) | 3.6 | |
| Speed (mph) (forward) | 0-5.7 | 0-6.7 |
| Overall Length | 75.2" | |
| Deck Size | 42" | 48" |
| Overall Width (w/o mower) | 39.8" | |
| Weight (lbs.) | 622 | 661 |

ADDITIONAL IMPLEMENTS AND ACCESSORIES

| | | |
|---|-----------|-----------|
| Armrest Kit | Standard | |
| Grass Catcher (blower not necessary) | GCK42-90T | GCK48-90T |
| Mulching Kit | T2832 | T2838 |
| Front Push Blade (48") | T2833 | |
| Two-Stage Snowblower (46") | T2834 | |

Easy to operate, fun to drive, the Kubota T Series is durable, and packed with premium features to keep you mowing efficiently and comfortably.

- > Equipped with a high performance 21.5-horsepower Kawasaki Engine
- > All models are equipped with hydrostatic transmissions (HST) for precise control
- > High-back seat provides extra cushioning and support, with dual armrests for comfort
- > The thicker and higher-positioned steering wheel helps to reduce fatigue and enhances operator comfort and control
- > Convenient 12V power outlet lets you charge your phone or power accessories like an air compressor
- > Short 14" turning radius allows easy maneuvering around difficult objects
- > Mower height adjusts from 1" to 4" right from the operator's seat with simple dial-cam setting
- > Upgraded fabricated mower deck, along with new tubular-frame structure, improves strength, rigidity, and durability
- > Ductile cast iron front axle is strong and durable, handling all sorts of bumps & shocks
- > Compatible with a full line of performance-matched, quick-attach front implements

| MID-MOUNT MOWER SPECIFICATIONS | | |
|--------------------------------|----------------------|------------|
| | RCK42P-90T | RCK48P-90T |
| Number of Blades | 2 | 3 |
| Cutting Width | 42" | 48" |
| Cutting Height | 1-4" | |
| Height Adj. Increments | 1/4" | |
| Lift System | Manual w/ gas assist | |



MOWERS



GR Series GR2020G | GR2120

With Kubota's revolutionary Glide Steer[®], all-wheel drive, plus tight turning, even difficult mowing conditions are now effortless.

- › Your choice of a 3-cylinder, 17-horsepower Kubota diesel engine or a 2-cylinder, 20-horsepower Kohler gasoline engine
- › Glide Steer[®] provides excellent turning maneuverability with front wheels that turn up to 70 degrees while helping to prevent turf damage
- › All-wheel drive (AWD) characteristics provide outstanding traction needed for mowing on rolling terrain
- › Versatile HST transmission is controlled by a single foot pedal for a smooth and comfortable ride
- › Shaft-driven mower, transmission, and PTO offer smooth, virtually trouble-free operations
- › Cruise control, full-flat operator platform and a comfortable high-back, adjustable suspension seat increase operator comfort
- › 5" deep, 48" and 54" contoured design mower decks are able to produce professional results
- › Equipped with Kubota's Reverse Awareness System (KRA) for additional safety when mowing in reverse
- › Variety of implements available for year-round versatility, including a grass catcher, two-stage snowblower, front blade, and mulching kit

GR Series

| | GR2020G | GR2120 |
|--------------------------|---|-----------------------------------|
| Engine Type | Air-cooled, gasoline, 2-cylinder | Liquid-cooled, diesel, 3-cylinder |
| Engine Model | Kohler | Kubota |
| Horsepower (gross) | 20.5* | 17** |
| Transmission | Hydrostatic | |
| Steering System | Glide Steer, hydrostatic power steering | |
| Deck Size | 48" | 48" / 54" |
| Overall Length | 77.2" | |
| Overall Width (w/ mower) | 61" (w/48") | 66.9" (w/54") |
| Weight (lbs.) (w/ mower) | 871 (w/48") | 970 (w/54") |

ADDITIONAL IMPLEMENTS AND ACCESSORIES

| | |
|---------------------|---------------------------|
| Front Blade | 48" |
| Grass Catcher | 3-bag, 10-bushel capacity |
| Mulching Kit | Optional |
| Snowblower | 2-stage 46" |
| Rear Weight Bracket | Optional |
| Suitcase Weights | Optional |

MOWER SPECIFICATIONS

| | RCK48-GR | RCK54-GR |
|------------------------|-----------|----------|
| Number of Blades | 3 | |
| Cutting Width | 48" | 54" |
| Cutting Height | 1-4" | |
| Height Adj. Increments | 1/4" | |
| Lift System | Hydraulic | |

* SAE J1940; ** SAE J1995



MOWERS



Z200 Series

Z232KW-42 | Z242KH-48 | Z242KW-48 | Z252KH-54 | Z252KW-54

The ultimate residential zero-turn mower — combining style, comfort, and performance.

- › K-Ride® comfort system provides enhanced comfort (features may vary)
- › Adjustable suspension seat standard on KW 48" & 54" models, optional on KH models
- › Folding ROPS standard on KW 48" & 54" models, optional on KH models
- › A 10-gauge steel, welded mower deck provides exceptional cutting performance for homeowners
- › Push button start allows for easy one-handed starting
- › Covered storage box keeps things out of the weather and safe
- › Convenient cup holders keep your drinks at hand
- › Wide-tread tires give you better traction and weight distribution to help protect your lawn
- › The K-Lift (mechanical one-push deck-lift pedal) makes adjusting the cutting height simple
- › Z232KW comes with a 42-inch deck to maneuver in and out of intricate spaces smoothly and with ease
- › Zero-turn steering for superior machine control and precision mowing
- › The Z200 series is covered by a limited four-year, 300-hour factory warranty

Z200 Series

| | Z232KW-42 | Z242KH-48 | Z252KH-54 | Z242KW-48 | Z252KW-54 |
|--|---|--|-----------|---------------------|-----------|
| Engine Type | Air-cooled, gasoline, V-Twin | | | | |
| Engine Model | Kawasaki FR | Kohler 7000 | | Kawasaki FR | |
| Horsepower (gross) | 21.5* | 22** | 25** | 21.5** | 24** |
| Displacement (cu. cm.) | 726 | 725 | 747 | 726 | |
| Transmission | Hydro-Gear™ Commercial ZT2200 Integrated Zero-Turn Transaxle | Hydro-Gear™ Commercial ZT3100 Integrated Zero-Turn Transaxle | | | |
| Fuel Tank Capacity (gal.) | 3.6 | 4.3 | | | |
| Speed (mph) (forward/reverse) | 0–6.5 / 0–4 | 0–8 / 0–4 | | | |
| Overall Length | 74.4" | 79.0" | | | |
| Overall Width (w/ mower chute down) | 55.1" | 61.1" | 67.3" | 61.1" | 67.3" |
| Overall Height | 66.7" | 73.0" Fixed ROPS | | 68.4" Foldable ROPS | |
| Wheel Base | 48.7" | 47.0" | | | |
| Weight (lbs.) | 643 | 811 | 827 | 844 | 860 |

MOWER SPECIFICATIONS

| | | | | | |
|------------------------------------|---------------------------------|----------------|-----|-----|-----|
| Mower Deck Type | Pro performance fabricated deck | | | | |
| Mower Lift System | Mechanical | | | | |
| Mower Height, Increment | 1.5–4.25", 1/4" | 1.5–4.5", 1/4" | | | |
| Mower Deck Width | 42" | 48" | 54" | 48" | 54" |
| Blade Tip Speed (fpm)(max): | 17,700 | 18,100 | | | |

IMPLEMENTS AND ACCESSORIES

| | | | | | |
|---|----------|----------|--|----------|--|
| Grass Catcher | Optional | | | | |
| Mulching Kit | Optional | | | | |
| Seat Suspension Kit | N/A | Optional | | Standard | |
| LED Working Light Kit | Optional | | | | |
| Canopy Sunshade & Deck Lift Assist Kit | N/A | Optional | | | |
| Arm Rest Kit | Optional | N/A | | | |
| Hitch Kit | Optional | N/A | | | |

* These Kawasaki engines have been tested in accordance with SAE J1995, verified by TÜV Rheinland Group, and certified by SAE International. The gross power ratings of these engines were determined by using measurements according to SAE J1995 which were witnessed by SAE-approved witnesses from TÜV Rheinland Group. Torque ratings of these engines were not certified, determined by using measurements according to SAE J1995 which were witnessed by SAE-approved witnesses from TÜV Rheinland Group. Torque ratings of these engines were not certified by SAE. Actual power and torque output will vary depending on numerous factors, including, but not limited to, the operating speed of the engine in application, environmental conditions, maintenance, and other variables.

** Power (hp) specifications for individual gasoline engine models are rated pursuant to Society of Automotive Engineers (SAE) J1940 or J2723 based on gross output testing performed in accordance with SAE J1995 without the air cleaner and muffler. Gross engine hp will be higher than actual engine power which is affected by accessories, application, engine speed, ambient operating conditions and other factors. The gross engine horsepower information is for comparison purposes only.

MOWERS



Z400 Series

Z412KW | Z422KW | Z422KWT | Z411KW | Z421KW | Z421KWT
Z452KWI | Z452KWT

Designed for the user who seeks professional performance and durability, as well as comfort and convenience.

Z412 and Z422 Features

- › Premium 22" high back 3" suspension seat offers thick cushion with high back and a 4" adjustable seat slide that improves comfort and reduces fatigue
- › Suspension seat is standard on the Z412, Z422, and the Z452 models
- › Powered by Kawasaki FS and FT Series Engines, the Z400 provides the torque you need to power through tall, tough grass conditions
- › The Z400 is driven by the dependable and durable Hydro-Gear ZT-3600 transmission
- › Maximum forward travel speed of 10 mph contributes to quickly completing the job at hand
- › A generous fuel tank capacity of 6.8 U.S. gallons (25.7 L)
- › Smooth patented weighted control lever operation with dampers that have three adjustment positions (weighted control levers not available on Z411 or Z421 models)
- › All deck sizes have 13"x6.5"-6" front pneumatic tires
- › The Z411, Z412, Z421 and Z422 have the pneumatic front caster tires. Z452 has semi-pneumatic front caster tires.
- › Simple operation of the mower lift pedal efficiently raises the mower deck
- › The operation panel is conveniently and integrally located on the right fender and features a simple, easy-to-operate design
- › Convenient 12V power outlet lets you charge your phone or power accessories like an air compressor
- › The seat features a thick cushion construction and the seat slides a full 4" travel forward and back, allowing even prolonged operations to be undertaken in maximum comfort (Z411 & Z421)

Z400 Series

| | Z412KW-48 Z411KW-48 | Z422KW-54 Z421KW-54 | Z422KWT-60 Z421KWT-60 | Z452KWi-54 | Z452KWTi60 |
|--|---|------------------------|--------------------------|--|------------|
| Engine Type | Air-cooled, gasoline, 2-cylinder | | | EFI - Air cooled V-twin vertical crank shaft gasoline engine | |
| Engine Model | Kawasaki FS 651V | Kawasaki FS 730V | | Kawasaki FT 730V EFI | |
| Horsepower (gross)* | 22 | 24 | | 26 | |
| Displacement (cu. cm.) | 726 | | | | |
| Transmission | Hydro-Gear ZT-3600 | | | | |
| Front Tire | 13" x 6.5" -6" (Z412 & Z422) 13" x 5" x 6" | | | 13 x 6.5-6 Semi-pneumatic | |
| Fuel Capacity (gal.) | 6.8 | | | | |
| Speed (mph) (forward/reverse) | 0-10 / 0-5 | | | | |
| Overall Length | 48.7" | | 54.2" | | 80.9 |
| Overall Width (w/ mower chute) | 61.1" | 67.3" | 73.6" | 67.3 | 73.6 |
| Overall Height (w/ROPS upright) | 69.8" | | | | |
| Weight (lbs.) (w/ mower) | 856 | 870 | 904 | 954 | 988 |

MOWER SPECIFICATIONS

| | RCK48P-400Z | RCK54P-400Z | RCK60P-400Z | RCK54P-400Z | RCK60P-400Z |
|-------------------------------------|-------------------------|-------------|-------------|-------------|-------------|
| Mower Deck Type | Kubota Side Discharge | | | | |
| Mower Lift System | Mechanical / Foot pedal | | | | |
| Deck Depth | 5" | | | | |
| Cutting Height | 1.5-5", 1/4" | | | | |
| Cutting Width | 48" | 54" | 60" | 54" | 60" |
| Blade Tip Speed (fpm) (max.) | 18880 | 18700 | 18300 | 18700 | 18300 |

ADDITIONAL IMPLEMENTS AND ACCESSORIES

| | Z400 Series |
|--|-------------|
| Grass Catcher Kit | Optional |
| Mulching Kit | Optional |
| Chute Block Kit | Optional |
| Suspension Seat Kit | Optional |
| LED Work Light Kit | Optional |
| Operator Controlled Discharge Chute | Optional |
| Canopy Sunshade | Optional |
| Maintenance Lift Kit | Optional |

* SAE J1995

These Kawasaki engines have been tested in accordance with SAE J1995, verified by TÜV Rheinland Group, and certified by SAE International. The gross power ratings of these engines were determined by using measurements according to SAE J1995 which were witnessed by SAE-approved witnesses from TÜV Rheinland Group. Torque ratings of these engines were not certified, determined by using measurements according to SAE J1995 which were witnessed by SAE-approved witnesses from TÜV Rheinland Group. Torque ratings of these engines were not certified by SAE. Actual power and torque output will vary depending on numerous factors, including, but not limited to, the operating speed of the engine in application, environmental conditions, maintenance, and other variables.

Power (hp) specifications for individual gasoline engine models are rated pursuant to Society of Automotive Engineers (SAE) J1940 or J2723 based on gross output testing performed in accordance with SAE J1995 without the air cleaner and muffler. Gross engine hp will be higher than actual engine power which is affected by accessories, application, engine speed, ambient operating conditions and other factors. The gross engine horsepower information is for comparison purposes only.

MOWERS



Z700 Series

Z781KWiTW | Z751KWi | Z781KWi | Z781KWiTi Z724XKW |
Z726XKW | Z723KH | Z724KH | Z725KH

Designed for the commercial landscape professional, the Z700 Series offers performance, productivity, comfort and the durability that Kubota is known for.

Z781KWiTW

- › Airless (Tweel) tires now standard on 54" and 60" models

Z700EFI Model Features

- › Kawasaki FX EFI engines feature a fully integrated electronic governor (E-GOV) and a cutting edge ECU control unit. They deliver outstanding performance without power loss
- › EFI dial throttle control delivers effortless engine control
- › LCD engine meter provides all the information you need to keep your Z700 EFI unit running at optimum efficiency
- › Equipped with 24" low profile tires
- › 12V Power outlet can charge or power many devices

All Model Features

- › Premium adjustable suspension seat offers a thick cushion with a 21.2" high back 3" suspension seat with 6" adjustable seat slide that allows you to find the ideal seating position for maximum comfort
- › New deck step indicator provides easier access
- › New water and dust proof safety switches help to reduce failures
- › 6"-deep mower deck and anti-scalp rollers help to provide fast, clean, superior grass-cutting performance
- › With an 11.2 mph maximum speed, it's Kubota's fastest zero-turn mower
- › Dual Parker transmission with an integrated pump and motor designed for increased efficiency and simplified maintenance

Z700 Series

| | Z781KWi-54 Z781KWTi-60 Z781KWITW | | | | | | | Z724XKW-3-48 Z724XKW-3-54 | | Z726XKW-3-60 | | Z723KH-3-48 | Z724KH-3-54 | Z725KH-3-60 | |
|----------------------------------|--|---------------------|---------------------|---------------------|---------------------------|---------------------------|---------------------------|------------------------------|--|--------------|--|-------------|-------------|-------------|--|
| Engine Type | Air-cooled, gasoline, V-Twin | | | | | | | | | | | | | | |
| Engine Model | Kawaski FX 730V EFI | Kawaski FX 850V EFI | Kawasaki FX FX 730V | Kawasaki FX FX 801V | KOHLER Command Pro® CV682 | KOHLER Command Pro® CV732 | KOHLER Command Pro® CV742 | | | | | | | | |
| Horsepower (gross) | 25.5* | 29.5* | 23.5* | 25.5* | 22.5** | 23.5** | 25** | | | | | | | | |
| Displacement (cu. cm.) | 726 | 852 | 726 | 852 | 694 | 694 | 747 | | | | | | | | |
| Transmission | Parker HTG14 | | | | | | | | | | | | | | |
| Fuel Capacity (gal.) | 11.6 | | | | | | | | | | | | | | |
| Speed (mph) (forward/reverse) | 0–11.2 / 0–5.6 | | | | | | | | | | | | | | |
| Overall Length | 83.9" | | | | | | | | | | | | | | |
| Overall Width (w/ mower) | 61.3" | 67.3"/ 73.8" | 61.3"/ 67.3" | 73.8" | 61.3" | 67.3" | 73.8" | | | | | | | | |
| Overall Height (w/ ROPS upright) | 70.1" | | | | | | | | | | | | | | |
| Wheel Base | 50.9" | | | | | | | | | | | | | | |
| Weight (lbs.) (w/ mower) | 1,215 | 1,254/1,285 | 1,207/1,223 | 1,276 | 1,212 | 1,226 | 1,257 | | | | | | | | |

MOWER DECK SPECIFICATIONS

| Mower Deck Type | Commercial fabricated deck | | | | | | |
|-------------------------------|----------------------------|--------------------|----------------------|----------------|----------------|----------------|----------------|
| Mower Deck Width, Lift System | 48" Mechanical | 54"/60" Mechanical | 48" / 54" Mechanical | 60" Mechanical | 48" Mechanical | 54" Mechanical | 60" Mechanical |
| Cutting Height | 1–5" | | | | | | |
| Height Adj. Increments | 1/4" | | | | | | |
| Mower Deck Depth | 6" | | | | | | |
| Blade Tip Speed (fpm) (max): | 18,600 | 18,400 / 18,600 | | | 18,600 | | |

IMPLEMENTS AND ACCESSORIES

| | |
|-------------------------------------|---|
| Premium Suspension Seat | Standard |
| Grass Catcher | Optional – 10 bushels (48" / 54"), 11 bushels (60") |
| Mulching Kit | Optional |
| Operator-Controlled Discharge Chute | Optional |
| Towing Hitch | Optional |
| LED Working Light Kit | Optional |
| Maintenance Lift Kit | Optional |
| Canopy Sunshade | Optional |
| Karu Mulching Blade | Optional, 60" only |

* SAEJ1995

These Kawasaki engines have been tested in accordance with SAE J1995, verified by TÜV Rheinland Group, and certified by SAE International. The gross power ratings of these engines were determined by using measurements according to SAE J1995 which were witnessed by SAE-approved witnesses from TÜV Rheinland Group. Torque ratings of these engines were not certified, determined by using measurements according to SAE J1995 which were witnessed by SAE-approved witnesses from TÜV Rheinland Group. Torque ratings of these engines were not certified by SAE. Actual power and torque output will vary depending on numerous factors, including, but not limited to, the operating speed of the engine in application, environmental conditions, maintenance, and other variables.

** SAE J1940

Power (hp) specifications for individual gasoline engine models are rated pursuant to Society of Automotive Engineers (SAE) J1940 or J2723 based on gross output testing performed in accordance with SAE J1995 without the air cleaner and muffler. Gross engine hp will be higher than actual engine power which is affected by accessories, application, engine speed, ambient operating conditions and other factors. The gross engine horsepower information is for comparison purposes only.

MOWERS



SZ Series

SZ19NC-36-2 | SZ22NC48-2 | S26NC-52-2 | SZ26NC-61-2

The Kubota SZ series commercial stand-on is the answer to get more done, faster and more efficiently, in even the tightest spaces while delivering superior comfort and durability.

All Models

- › Commercial-grade Kawasaki FX & FT EFI gas engines equipped with Hydro-Gear integrated transmissions
- › Adjustable front baffle on cutting decks (on 48", 52" and 61")
- › Smooth 3-position adjustable dampened controls
- › Tool-less adjustable front reference bar
- › Large operator platform (48", 52" and 61" models)
- › Tool-less tracking adjustment
- › Ergonomic cushion pad
- › No-flat front castors

SZ Series

| | SZ19NC-36-2 | SZ22NC-48-2 | SZ26NC-52-2 | SZ26NC-61-2 |
|------------------------------------|--|--|---------------------|-------------|
| Engine Type | Kawasaki FX600V | Kawasaki FX691V | Kawasaki FT730V-EFI | |
| Horsepower (gross)* | 19 HP | 22 HP | 26 HP | |
| Transmission | Hydro-Gear ZT3100 | Hydro-Gear ZT3600 | | |
| Speed | 9 MPH | 11 MPH | | |
| Fuel Capacity (gal.) | 5.1 | 6.5 | | |
| Deck Type | Fabricated Floating | | | |
| Deck (ga) | 7 ga top and side skirts w/ 3 ga reinforcement | 10 ga top and 7 ga side skirts w/ 3 ga reinforcement w/ adjustable front baffle (on -2 models) | | |
| Deck Spindle & Bearings | 1" Shaft w/ Maintenance-Free Seal Bearings | | | |
| Deck Size | 36" | 48" | 52" | 61" |
| BladeTip Speed (fpm) | 17,950 | 17,773 | 18,585 | 18,850 |
| Cutting Height | Adjustable 1.5" - 4.5" | | | |
| Front Tires (Flat-Free) | 11" x 6"-5" | 13" x 6.5"-6" | | |
| Rear Tire | 20" x 8"-10" | 23" x 8.5"-12" | 23" x 10.5"-12" | |
| Weight (lbs.) | 800 | 961 | 991 | 1,028 |
| Length | 64" | | | |
| Height | 45" | 45.75" | | |

| ATTACHMENTS | | | | |
|------------------------------------|-------|---------|----------|---------|
| Mulch Kit | SMK36 | SMK48-2 | SMK52-2 | SMK61-2 |
| Discharge Plate | SBP36 | SBP48-2 | SBP52-2 | SBP61-2 |
| Weight Kit | SWK36 | SWK48 | | |
| Striping Kit | N/A | SSK48 | SSK52-61 | |
| Deck Lift Assist | N/A | SZLA01 | | |
| Accelerator Grass Catcher 1 | SGC61 | | | |

* SAEJ1995



MOWERS



W Series

WHF14NC-36-2 | WHF15NC-48-2 | WHF19NC-52-2

Kubota's durable Commercial Walk-Behind Mowers offer options for all commercial mowing, small and large.

WHF14NC-36-2 / WHF15NC-48-2 / WHF19NC-52-2

- › The ergonomic handle design and intuitive control layout keep operators mowing confidently and comfortably
- › All models use commercially proven Kawasaki FS-series engines to deliver reliable performance and superior durability
- › The durable Hydro-Gear ZT-2800 hydrostatic transaxles deliver smooth and simple operation with ground speeds of up to 6.5 mph
- › The large rear wheels provide ample ground clearance to enable smooth, easy maneuverability on all types of terrain
- › The dependable cutting decks are equipped with steel-fabricated spindle assemblies and welded baffle systems
- › Easy to maintain features include a tool-less oil drain, a handy external oil filter location and easy battery access

Walk-Behind Mowers

| | WHF14NC-36-2 | WHF15NC-48-2 | WHF19NC-52-2 |
|------------------------------|---|---------------------|---------------------|
| Engine Type | Kawasaki FS481V | Kawasaki FS541V | FS600V Kawasaki |
| Horsepower (gross)* | 14.5 | 15 | 18.5 |
| Fuel Capacity (gal.) | 5 | | |
| Speed (mph) | 6.5 | | |
| Transmission | Hydro-Gear ZT-2800 transmissions | | |
| Mower Deck Type | Fabricated Floating Deck with Wear Band | | |
| Deck (ga) | 10 ga deck with 10 ga top and 7 ga skirts | | |
| Blade Tip Speed (fpm) | 18,127 | 16,832 | 18,645 |
| Cutting Height | 1.5" - 4.5" | | |
| Starter | Electric | | |
| Hand Controls | Ergonomic Bull Horn | | |
| Deck Spindle | Maintenance-free with 1" shaft | | |
| Spindle Bearings | Precision-ground double-sealed bearings | | |
| Deck Drive | Warner Mag Stop 105 ft-lb electric clutch | | |
| Front Tires | 11" x 6"-4" No-Flat | | |
| Rear Tires | 20" x 6.5" - 8" | 20" x 8" - 8" | |
| Brakes | (-2) Hydrostatic Dynamic Braking | | |
| Weight (lbs.) | 774 | 789 | 832 |
| Length | 78" | | |
| Height | 40.3" | 43" | |

* SAE J1995

MOWERS



ZG200 Series ZG222 | ZG227

The professional-quality performance, exceptional comfort, and outstanding reliability of the ZG200 Series make it the ultimate mowing machine for both professionals and homeowners.

- › Powered by durable 21.1- and 26-horsepower air-cooled Kubota gasoline engines
- › Zero-turn steering for superior navigation
- › Reliable, ultra-smooth, hydrostatic transmission offers superior durability and performance
- › Heavy-duty Pro Commercial Mower Deck features a unique baffle system that discharges grass clippings for professional looking results
- › Optional mulching system provides a beautiful finish, even in thick grass
- › Foot-operated hydraulic deck-lift system for easy adjustment
- › Spacious platform, comfortable and supportive seating, and an easy-to-reach cup holder for operator comfort
- › Operator-friendly instrument panel puts everything within close reach
- › Convenient mower, HST, and engine access for hassle-free maintenance
- › Foldable ROPS standard

ZG200 Series

| | ZG222-48 | ZG227-54/60 |
|--|---|--------------------|
| Engine Type | Kubota air-cooled, gasoline, 2-cylinder | |
| Engine Model | Kubota KGZ770-M3 | Kubota KGZ770-M2 |
| Horsepower (gross)* | 21.1 | 26 |
| Displacement (cu. cm.) | 768 | |
| Transmission | 2-HST w/gear reduction | |
| Fuel Capacity (gal.) | 7.1 | |
| Speed (mph) (forward/reverse) | 0–9 / 0–5 | |
| Overall Length | 82.5" | 82.5" / 83.7" |
| Overall Width (w/ mower chute) | 61" | 67.3" / 75.2" |
| Overall Height (w/ROPS upright) | 69.9" | |
| Overall Height (w/ROPS folded) | 52.8" | |
| Weight (lbs.) (w/ mower) | 1,168 | 1,190 / 1,235 |

MOWER SPECIFICATIONS

| | ZG222-48 | ZG227-54/60 |
|---------------------------------------|------------------------|------------------------|
| Mower Deck Type | Welded, side discharge | Welded, side discharge |
| Mower Deck Width / Lift System | 48" / Hydraulic | 54 or 60" / Hydraulic |
| Cutting Height | 1–5" | |
| Height Adj. Increments | 1/4" | |
| Mower Deck Depth | 6" (48) | 6" |

ADDITIONAL IMPLEMENTS AND ACCESSORIES
ZG200 Series

| | |
|--------------------------|----------|
| Canopy Sunshade | Optional |
| Grass Catcher | Optional |
| Mulching Kit | Optional |
| Working Light Kit | Optional |

* SAE J 1940

MOWERS



ZG300 Series ZG327P | ZG327RP

Built for power, durability, and performance, the ZG300 Series features deep mower decks for exceptional cutting performance.

- › ZG300 mowers are available with durable Kubota air-cooled gasoline engines with 26 gross horsepower
- › Durable HST transmission optimizes performance to achieve maximum results
- › Pro Commercial Deck is a superior deep mower deck that helps to ensure excellent cutting performance
- › Anti-scalp swivel rollers can rotate a full 360 degrees helping to prevent unsightly turf damage
- › Large-capacity dual fuel tanks on ZG300 Series models
- › Foot-controlled hydraulic deck lift and PTO wet disc clutch
- › Unique maintenance lift system allows easy mower access (optional on ZG300 models)
- › Tie-down for securing onto flatbed truck or trailer for convenient transportation
- › “Flat-free” front caster tires are standard with ZG300 and enable mowing operation without worrisome flat-tire downtime

ZG300 Series
**ZG327P-60
ZG327RP-60R**

| | |
|---------------------------------------|---|
| Engine Type | Kubota air-cooled, gasoline, 2-cylinder |
| Engine Model | Kubota KGZ770 |
| Horsepower (gross)* | 26 |
| Displacement (cu. cm.) | 768 |
| Transmission | 2-HST w/gear reduction |
| Fuel Capacity (gal.) | 12.7 |
| Speeds (mph) (forward/reverse) | 0–10.6 / 0–5.3 |
| Overall Length | 87.8" |
| Overall Width (w/ mower) | 75.2" |
| Overall Height | 75.4" |
| Weight (lbs.) | 1,565 |

MOWER SPECIFICATIONS

| | |
|---------------------------------------|---------------------------------|
| Mower Deck Type | Welded, side, or rear discharge |
| Mower Deck Width / Lift System | 60" / Hydraulic |
| Mower Height / Increment | 1–5" / 1/4" |
| Mower Deck Depth | 6.5" |

ADDITIONAL IMPLEMENTS AND ACCESSORIES
ZG300 Series

| | |
|----------------------------|----------|
| Canopy Sunshade | Optional |
| Front Utility Blade | Optional |
| Grass Catcher** | Optional |
| Mulching Kit | Optional |
| Spark Arrester | Optional |
| Striping Kit | Optional |
| Working Light Kit | Optional |
| Karu Mulching Blade | Optional |

* SAE J 1940



Product may be shown with optional equipment

ZD1000 Series ZD1011 | ZD1021

Top to bottom, front to back, and inside and out, Kubota's ZD Series of zero-turn mowers is engineered for quality. Versatile and reliable, the ZD1000 compact mower can handle jobs big and small.

- › The Kubota ProDeck with ACS (Aerodynamic Cutting System®) delivers professional looking results, meaning you can get the job done better and faster
- › Redesigned clean-cut blades have a new shape that improves overall load balance and provides a longer service life
- › Discharge chute has been redesigned with a flexible yet strong material, to help ensure a smoother and more uniform discharge of clippings
- › Improved fuel efficiency — up to 22% better
- › Low center of gravity provides stability on slopes and uneven ground
- › A two-pedal hydraulic deck-lift system lets you easily raise and lower the deck with your foot

ZD1000 Series

| | ZD1011-48 / ZD1011-54 | ZD1021-60 |
|---|--|-------------------------------|
| Engine Type | Kubota liquid-cooled, diesel, 3-cylinder | |
| Engine Model | Kubota D782-E4-ZD-3 | Kubota D902-E4-ZD-2 |
| Horsepower (gross)* | 19.3 | 21.6 |
| Displacement (cu. cm.) | 778 | 898 |
| Transmission | 2-HST w/gear reduction | |
| Fuel Capacity (gal.) | 6.0 | |
| Speed (mph) (forward/reverse) | 0–9 / 0–5 | |
| Overall Length | 87.8" | 88.8" |
| Overall Width (w/ mower chute) | 61.6" / 67.3" | 73.8" |
| Overall Height (w/ ROPS upright) | 74.4" | |
| Front Tires | 13 x 5.0-6 smooth pneumatic | 13 x 6.5-6 smooth pneumatic |
| Rear Tires | 24 x 9.5-14 low-profile tire | 24 x 12.0-14 low-profile tire |
| Brakes | Wet multi-discs, foot applied, released | |
| Weight (lbs.) (w/ mower) | 1,296 / 1,323 | 1,389 |

MOWER DECK SPECIFICATIONS

| | RCK48P-1000Z | RCK54P-1000Z | RCK60P-1000Z |
|-------------------------------------|-------------------------|--------------|--------------|
| Mower Deck Type | Kubota ProDeck with ACS | | |
| Mower Lift System | Hydraulic | | |
| Deck Depth | 6" | | |
| Cutting Height | 1–5" | | |
| Cutting Width | 48" | 54" | 60" |
| Blade Tip Speed (fpm) (max.) | 17100 | | 18200 |

ADDITIONAL IMPLEMENTS AND ACCESSORIES

| | ZD1011-48 / ZD1011-54 | ZD1021-60 |
|--|-----------------------|-----------|
| “Catch All” 2-Bag Style Grass Catcher | Optional | |
| Hitch Kit | Optional | |
| Operator-Controlled Discharge Chute | Optional | |
| Work Light Kit | Optional | |
| Canopy Sunshade | Optional | |

* SAE J1995



ZD1200 Series ZD1211 | ZD1211R | ZD1211L | ZD1211RL

With a bigger engine and wider mower deck, the ZD1200 gets the job done with speed and efficiency. These premium mowers incorporate the best of Kubota's advanced technology in every detail and it helps to ensure both superior mowing performance and supreme operator comfort.

- › The large LCD meter shows all of the key indicators you need to maximize cutting performance and operability
- › For faster operation and better ergonomics, the mower deck controls are on the right side within easy reach of your hand, letting you quickly and easily adjust the cutting height
- › Equipped with low profile tires
- › Redesigned HST levers not only provide more legroom but more settings to choose from, to help ensure smoother operation, better zero-turn maneuverability, and greater job efficiency
- › A more comfortable, fully padded and reclining bucket seat means less operator fatigue and greater productivity — with dual adjustable armrests, higher backrest, and lumbar support
- › The optional “Catch All” hopper-style grass catcher holds 11.4 bushels of clippings and can be emptied while the operator remains seated

ZD1200 Series

| | ZD1211-60 / ZD1211R-60R | ZD1211L-72 / ZD1211RL-72R |
|---------------------------------|--|---------------------------|
| Engine Type | Kubota liquid-cooled, diesel, 3-cylinder | |
| Engine Model | Kubota D1105-E4-ZD-2 | |
| Horsepower (gross)* | 23.3 | |
| Displacement (cu. cm.) | 1,123 | |
| Transmission | 2-HST w/gear reduction | |
| Fuel Capacity (gal.) | 13.0 | |
| Speed (mph) (forward/reverse) | 0–10.6 / 0–5.3 | |
| Overall Length | 89" | 93.7" |
| Overall Width (w/ mower chute) | 73.8" / 63" | 85.8" / 75.2" |
| Overall Height (w/ROPS upright) | 78.7" | |
| Front Tires | 15 x 6.5-8 smooth semi-pneumatic | |
| Rear Tires | 26 x 12.0-16 low-profile tire | |
| Brakes | Wet multi-discs, foot applied, released | |
| Weight (lbs.) (w/ mower) | 1,687 / 1,720 | 1,764 / 1,786 |

MOWER DECK SPECIFICATIONS

| | RCK60P-1200Z | RCK60RP-1200Z | RCK72P-1200Z | RCK72RP-1200Z |
|------------------------------|-------------------------|----------------|-------------------------|----------------|
| Mower Deck Type | Kubota ProDeck with ACS | Kubota ProDeck | Kubota ProDeck with ACS | Kubota ProDeck |
| Mower Lift System | Hydraulic | | | |
| Deck Depth | 6.0" | 5.5" | 6.0" | 5.5" |
| Cutting Height | 1–5" | | | |
| Cutting Width | 60" | | 72" | |
| Blade Tip Speed (fpm) (max.) | 18,050 | 16,900 | 18,050 | 18,000 |

ADDITIONAL IMPLEMENTS AND ACCESSORIES

| | ZD1211-60 / ZD1211-60R | ZD1211L-72 / ZD1211RL-72R |
|--|------------------------|---------------------------|
| “Catch All” Hopper-Style Grass Catcher | Optional | |
| “Catch All” 2-Bag Style Grass Catcher | Optional | |
| Karu Mulching Blade | Optional, 60" & 72" | |
| Hitch Kit | Optional | |
| Operator-Controlled Discharge Chute | Optional | |
| Work Light Kit | Optional | |
| Canopy Sunshade | Optional | |

* SAE J1995



ZD1611 Series

ZD1611RL | ZD1611LF | ZD1611RFL

The ZD1611 stakes its place at the top of the line of Kubota's diesel zero-turn mowers with the electronically controlled Kubota diesel engine and the Aerodynamic Cutting System® to significantly enhance cutting performance.

- › The flexible discharge chute helps to ensure superior scattering of clippings
- › Wider, thicker, and more durable blades contribute to optimized air flow
- › Compared to previous model the ZD1611 features an enlarged flywheel that is responsible for an increase from 29.1 hp (21.7 kW) to 30.8 hp (23 kW)
- › The hydraulic transmission, a unique Kubota feature, ideally complements the V1505 Kubota diesel engine
- › The 3.5" (88.9 mm) wide LCD Panel provides machine diagnostics and machine performance indicators
- › Two-pedal type hydraulic lift system enables the operator to easily raise the mower deck when an obstacle is encountered
- › Operators do not need to remove hands from levers to engage the parking brake through use of the conveniently located parking brake pedal
- › The simple and easy to use two-pin type maintenance lift allows for quick access to the mower deck making maintenance a breeze

ZD1600 Series

| | ZD1611RL-60R | ZD1611LF-72 / ZD1611RLF-72R |
|---------------------------------|---|-----------------------------|
| Engine Type | Diesel, liquid-cooled (4cyl.) with DPF | |
| Engine Model | Kubota V1505-CR-TE5-ZD1 | |
| Horsepower (gross)* | 30.8 | |
| Displacement (cu. cm.) | 1,498 | |
| Transmission | 2-HST w/gear reduction | |
| Fuel Capacity (gal.) | 13.0 | |
| Speed (mph) (forward/reverse) | 0–10.6 / 0–5.3 | |
| Overall Length | 105.7" | |
| Overall Width (w/ mower chute) | 63" | 85.8" / 75.2" |
| Overall Height (w/ROPS upright) | 78.7" | |
| Front Tires | 15 x 6.5-8 smooth semi-pneumatic | |
| Rear Tires | 26 x 12.0-16 low-profile tire | |
| Brakes | Wet multi-discs, foot applied, released | |
| Weight (lbs.) (w/ mower) | 2,105 | 2,094 / 2,105 |

MOWER DECK SPECIFICATIONS

| | RCK60RP-1500Z | RCK72P-1500Z | RCK72RP-1500Z |
|------------------------------|----------------|-------------------------|----------------|
| Mower Deck Type | Kubota ProDeck | Kubota ProDeck with ACS | Kubota ProDeck |
| Mower Lift System | Hydraulic | | |
| Deck Depth | 5.5" | 6.0" | 5.5" |
| Cutting Height | 1–5", 1/4" | | |
| Cutting Width | 60" | 72" | |
| Blade Tip Speed (fpm) (max.) | 17,200 | 18,300 | |

ADDITIONAL IMPLEMENTS AND ACCESSORIES

| | ZD1611RL | ZD1611LF | ZD1611RFL |
|--|---------------|----------|-----------|
| Mulch Kits | Optional | | |
| Work Light Kit | Optional | | |
| Canopy Sunshade | Optional | | |
| Operator Controlled Discharge Chute (OCDC) | N/A | Optional | N/A |
| Karu Mulching Blade | Optional, 72" | | |

* SAE J1995

MOWERS



F Series F2690E | F2690 | F3710

The F Series sets a new standard for professional front-mount mowers with cleaner emissions and greater power, precision, and efficiency.

- › Kubota diesel engines provide fast, and efficient job performance with high-torque rise that allows you to power through tall or wet grass
- › The F3710 offers the highest-ever horsepower among all Kubota front-mount mowers
- › 6" deep, side-discharge deck design lets tall grass stand up so it can be cut more easily with a cleaner appearance
- › Large operator's platform, deluxe high-back seat with four separate adjustments and operator levers, for maximum driving comfort and convenience
- › Hydrostatic power steering reduces operator fatigue and makes it easier to mow around trees and other obstacles

F Series

| | F2690E | F2690 | F3710 |
|-------------------------------|--|----------------|--|
| Engine Type | Kubota liquid-cooled, diesel, 3-cylinder | | Kubota liquid-cooled, diesel, 4-cylinder |
| Engine Model | Kubota D1105 | | Kubota V1505-CR-TE5-FM2 |
| Horsepower (gross)* | 23.3 | | 36.9 |
| Displacement (cu. cm.) | 1,123 | | 1,498 |
| Transmission | Hydrostatic, 2-range | | |
| Fuel Capacity (gal.) | 16.1 | | |
| Speed (mph) (forward/reverse) | 0-12 / 0-6.2 | 0-12.4 / 0-6.8 | |
| Overall Length | 96.5" | | 99.6" |
| Overall Width | 48.8" | 53.9" | |
| Overall Height | 77.8" | 78.1" | |
| Min. Ground Clearance | 6.9" | 7.3" | |
| Weight (lbs.) | 1,559 | 1,590 | 1,872 |

MOWER SPECIFICATIONS

| | RCK60P-F39 | RCK72P-F39 | RCK60R-F36 | RCK72R-F36 |
|------------------|------------------------|------------|------------------------|------------|
| Mower Deck Type | Welded, side discharge | | Welded, rear discharge | |
| Cutting Width | 60" | 72" | 60" | 72" |
| Cutting Height | 1-5", 1/4" | | | |
| Mower Deck Depth | 6" | | 5.5" | |

ADDITIONAL IMPLEMENTS AND ACCESSORIES

| | F2690E | F2690 | F3710 |
|--|--------|----------|-------|
| Hard Cab Enclosure | | Optional | |
| Cab Heater | | Optional | |
| Grass Catcher 12-Bushel, Low-Dump Style | | Optional | |
| Debris Blower | | Optional | |
| 60" Front Blade | | Optional | |
| 60" Rotary Sweeper | | Optional | |
| Snow Blower | | Optional | |
| Mulching Kit | | Optional | |

* SAE J1995

KUBOTA SERVICES

KUBOTA GENUINE PARTS

Kubota provides customers parts support, parts, and manuals through Kubota's national dealer network. We support our dealers with four large warehouses located strategically throughout the United States.

Kubota Genuine Parts is a full line of O.E.M. and maintenance parts designed and engineered to original factory specifications to keep your Kubota equipment operating at peak performance.

KUBOTA ORANGE PROTECTION PROGRAM®

The Kubota Orange Protection Program gives you the opportunity to extend your coverage, without interruption, by one or two years. You can purchase your warranty extension through your Kubota dealer any time before the expiration of the regular Kubota Limited Warranty.¹

BENEFITS AT A GLANCE

- > Comprehensive coverage
- > Protects your investment
- > Provides peace of mind
- > Reliability of genuine Kubota parts
- > Extends both the Basic and applicable Power Train coverage
- > Administered by Kubota Tractor Corporation
- > Sold and serviced by your authorized Kubota Extended Warranty dealer
- > Financing available, if purchased at the same time as your tractor
- > No deductibles
- > Fully transferable



**KUBOTA-BACKED, NO DEDUCTIBLE
EXTENDED WARRANTY SOLUTION**

FOR MORE INFORMATION:

VISIT YOUR LOCAL KUBOTA DEALER OR CALL 888-398-9782

KUBOTA CREDIT CORPORATION, U.S.A.

Since 1982, Kubota has extended a wide range of financing alternatives to customers through Kubota Credit Corporations, U.S.A. (KCC). KCC offers competitive interest rates, flexible down payments, monthly and seasonal payment terms, and a Kubota-sponsored property damage insurance program. Kubota dealers can tailor a variety of finance programs² to meet the specific requirements of their customers.

FOR MORE INFORMATION, VISIT YOUR LOCAL KUBOTA DEALER OR WWW.KUBOTACREDITUSA.COM

¹ - Orange Protection is available in Florida for Commercial Customers only.

² - Subject to credit approval through Kubota Credit Corporation, U.S.A.

Kubota®
GENUINE PARTS

KTAC INSURANCE AGENCY

Created specifically for Kubota customers, KTAC Insurance is a Kubota-endorsed physical damage insurance program providing “all risk” protection.*

BENEFITS AT A GLANCE

- › Coverage against flood, wind, infestation, upset and collision, falling objects, theft, fire, vandalism, and more
- › In-transit and off-property protection
- › Low \$250 deductible
- › Convenient payment options
- › Transportation reimbursement

KCC customers also receive original sales price protection (including taxes and fees)** for the first 60 months of the finance agreement.

FOR MORE INFORMATION, CONTACT A KTAC REPRESENTATIVE AT 800-348-5802 OR VISIT WWW.KTACINSURANCEAGENCY.COM.

* See policy for details

**This is a summary of the Kubota-Endorsed Property Damage Insurance Program. This information is descriptive only and is not intended to be a solicitation or an offer to sell any insurance product or service, nor is the information a complete description of all of the terms, conditions and exclusions applicable. Actual coverage is subject to the language of the policy issued. This policy is underwritten by Ohio Indemnity Company.

KUBOTA LEASING

In this credit-tight economy, leasing is critical to getting the Kubota equipment your business needs to grow. With the new Kubota Leasing program, commercial customers have access to flexible leasing that makes the full Kubota product line more affordable.


PROGRAM HIGHLIGHTS INCLUDE:

- › Affordable monthly payments
- › Fast, easy application process
- › Application only required up to \$150,000
- › Same-day credit decisions with complete information
 - › Transactions starting at \$3,000 and up
 - › 24-, 36-, 48- or 60-month terms
- › Flexible structures to match your cash flow and budget

Download the myKubota app and see all compatible attachments for your unit

Find Kubota performance matched implements & attachments to go along with your unit directly in the myKubota app.

Scan to download now

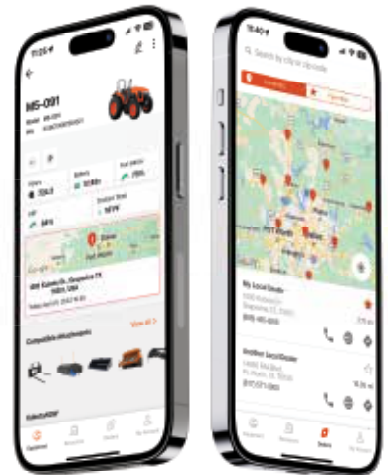

Kubota Tractor Corporation reserves the right to change the stated specifications without notice. This brochure is for descriptive purposes only and reasonable efforts were used to set forth the contained information; some items shown may be optional and some products shown may not be available at all dealerships. Kubota disclaims all representations and warranties, express or implied, or any liability from the use of this brochure. For complete warranty, safety and product information, consult your local Kubota dealer and the operator's manual. Power (HP/KW) and other specifications are based on various standards or recommended practices. For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications. This brochure is intended for the United States and US territories only. For information regarding Kubota products or services outside these areas, see Kubota Corporation's global web site. Kubota does not provide parts, warranty or service for any Product which is re-sold or retailed in any country other than the country for which the Product(s) were designed or manufactured.



KUBOTA TRACTOR CORPORATION

1000 Kubota Drive
Grapevine, TX 76051
KubotaUSA.com



This brochure is for descriptive purposes only. Please contact your local Kubota dealer for warranty and safety information. See dealer for details.
77700-13568 Rev 02-25 Full Product Line Brochure | © 2025 Kubota Tractor Corporation